


阀系列产品介绍

Introduction of Valve Series

高压电磁阀系列

High Pressure Solenoid Valve Series



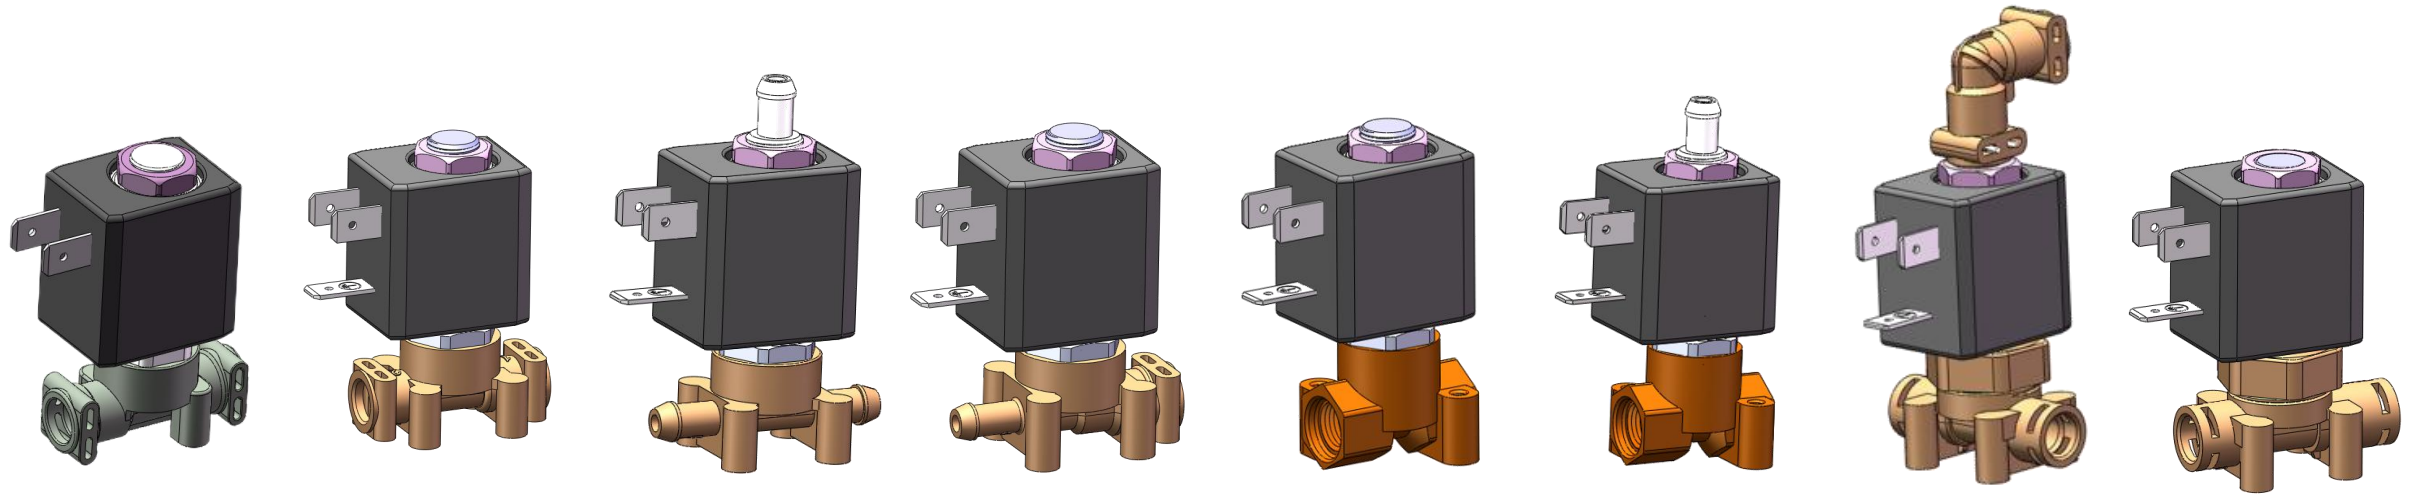


DEV02

DEV03

High Pressure Solenoid Valve

型号Model : DEV02

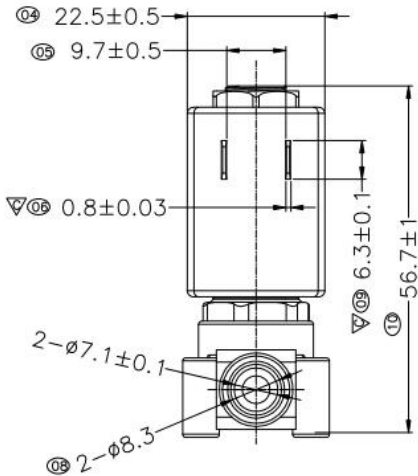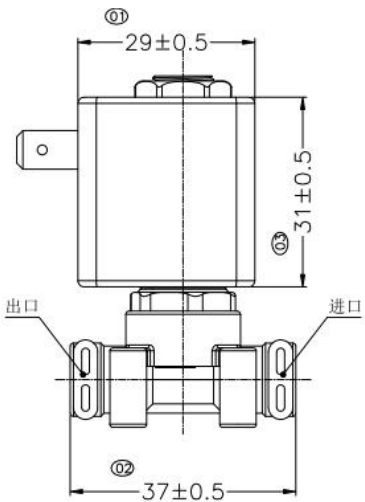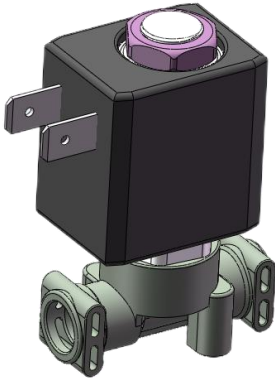

基本规格参数 Specification




电压 Voltage	DC12V/DC24V/DC36V/AC110V AC220V
适用压力 Pressure range	0~2.0MPa ;
介质温度 Medium temperature	0 ~ 140℃
使用寿命 Service life	>100K cycles
适用介质 Compatible media	水、气、水蒸汽 , 二氧化碳 Water, Air, Steam, CO2
连接方式 Connection type	Φ4mm铁氟龙管接头 / 250端子 Φ4mm PTFE tube fitting/250 Terminal

功能特点
Function and Characteristics

适用苏打水机或咖啡机

Suitable for soda maker or coffee maker

型号Model : DEV02

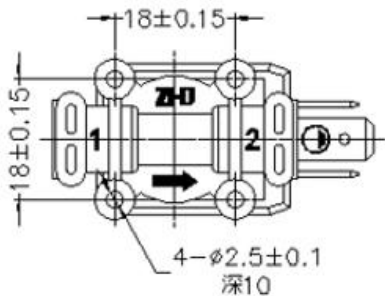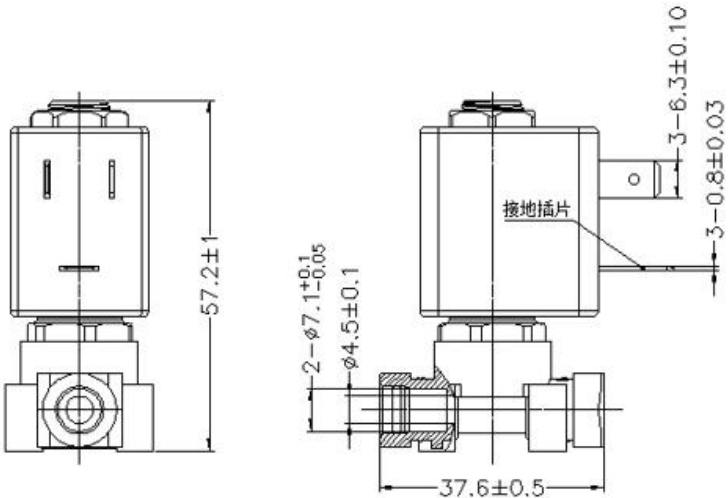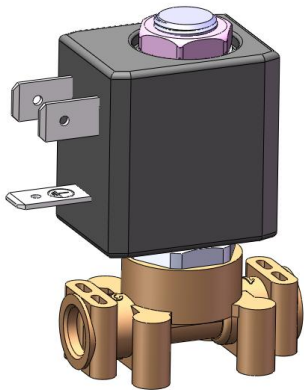

高压电磁阀 High Pressure Solenoid Valve

基本规格参数 Specification

电压 Voltage	DC12V/DC24V/DC36V/AC110V AC220V
适用压力 Pressure range	0~2.0MPa ;
介质温度 Medium temperature	0 ~ 140℃
使用寿命 Service life	>100K cycles
适用介质 Compatible media	水、气、水蒸汽, 二氧化碳 Water, Air, Steam, CO2
连接方式 Connection type	Φ4mm铁氟龙管接头 Φ4mm PTFE tube fitting





功能特点 Function and Characteristics

适用苏打水机或咖啡机

Suitable for soda maker or coffee maker

High Pressure Solenoid Valve

型号Model : DEV02

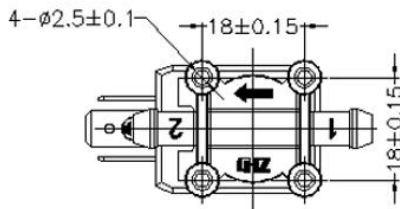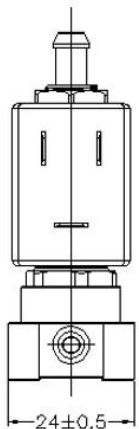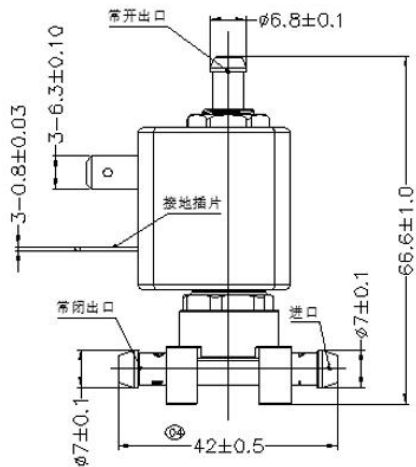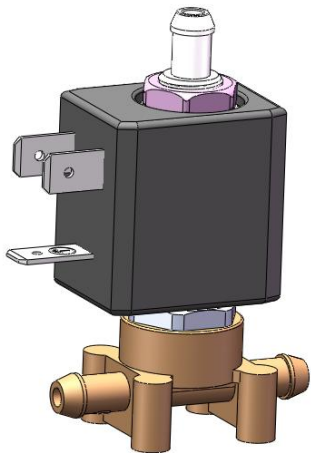

基本规格参数 Specification




电压 Voltage	DC12V/DC24V/DC36V/AC110V AC220V
适用压力 Pressure range	0~2.0MPa ;
介质温度 Medium temperature	0 ~ 140℃
使用寿命 Service life	>100K cycles
适用介质 Compatible media	水、气、水蒸汽，二氧化碳 Water, Air, Steam, CO2
连接方式 Connection type	高压硅胶管 / 250端子 High-pressure silicone rubber tube/250 Terminal

功能特点 Function and Characteristics

适用苏打水机或咖啡机

Suitable for soda maker or coffee maker

型号Model : DEV02

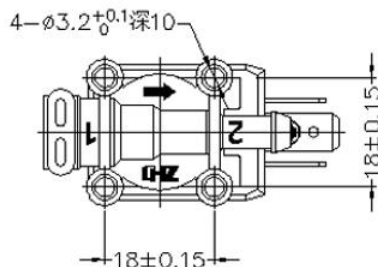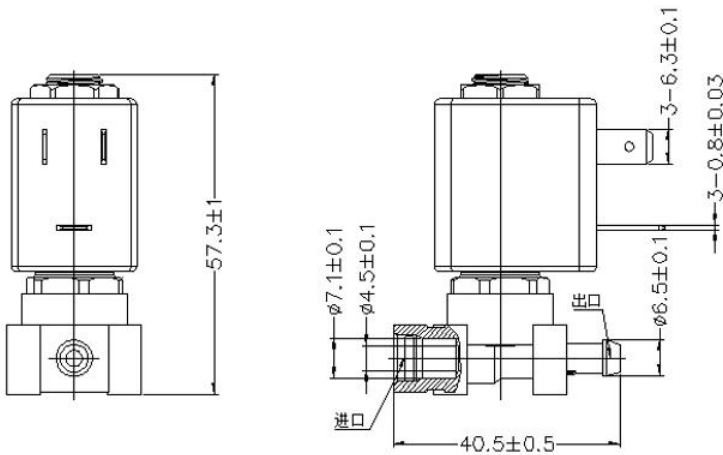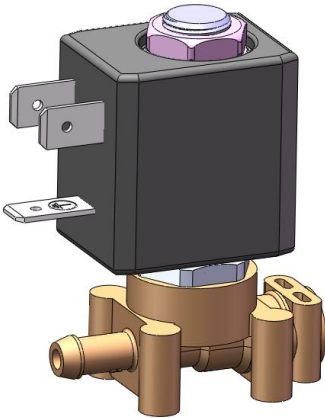





高压电磁阀 High Pressure Solenoid Valve

基本规格参数 Specification	
电压 Voltage	DC12V/DC24V/DC36V/AC110V AC220V
适用压力 Pressure range	0~2.0MPa ;
介质温度 Medium temperature	0 ~ 140℃
使用寿命 Service life	>100K cycles
适用介质 Compatible media	水、气、水蒸汽, 二氧化碳 Water, Air, Steam, CO2
连接方式 Connection type	Φ4mm铁氟龙管接头+高压硅胶管 Φ4mm PTFE tube fitting/High- pressure silicone rubber tube

功能特点 Function and Characteristics
适用苏打水机或咖啡机 Suitable for soda maker or coffee maker

High Pressure Solenoid Valve

型号Model : DEV02

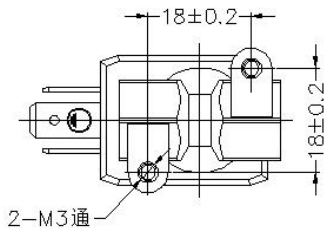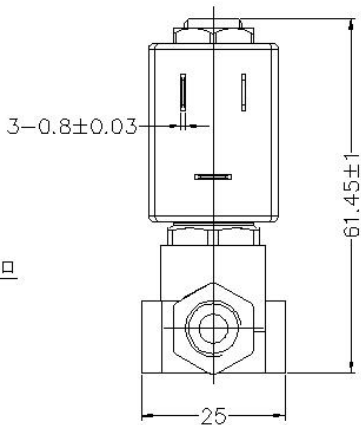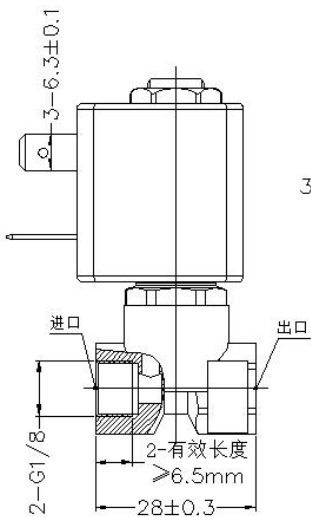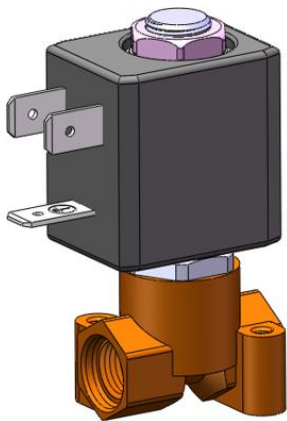

基本规格参数 Specification

电压 Voltage	DC12V/DC24V/DC36V/AC110V AC220V
适用压力 Pressure range	0~2.0MPa ;
介质温度 Medium temperature	0 ~ 140℃
使用寿命 Service life	>100K cycles
适用介质 Compatible media	水、气、水蒸汽, 二氧化碳 Water, Air, Steam, CO2
连接方式 Connection type	G1/8管螺纹接头 G1/8 pipe thread fitting




功能特点 Function and Characteristics

适用苏打水机或咖啡机

Suitable for soda maker or coffee maker

High Pressure Solenoid Valve

型号Model : DEV02

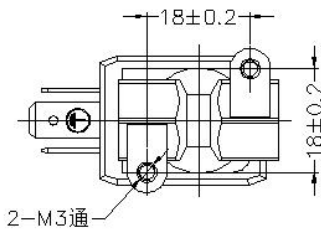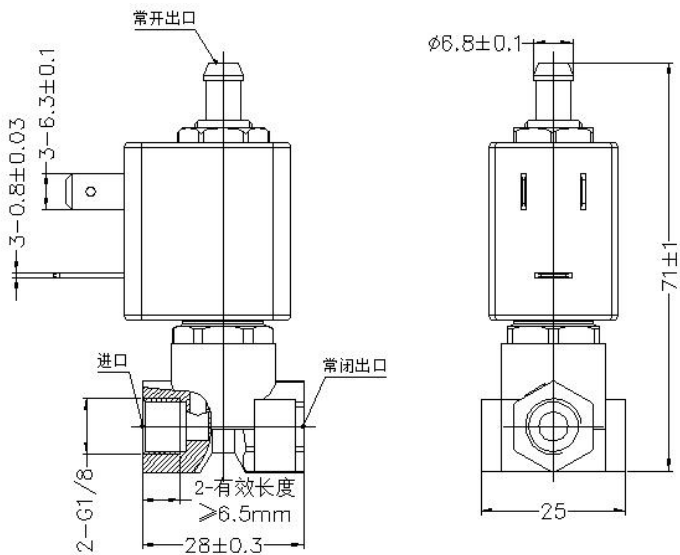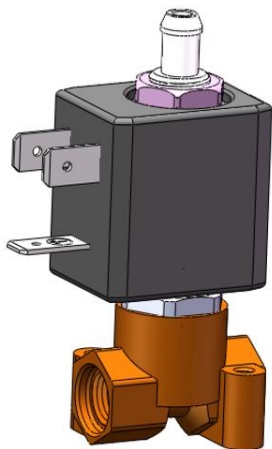

基本规格参数 Specification

电压 Voltage	DC12V/DC24V/DC36V/AC110V AC220V
适用压力 Pressure range	0~2.0MPa ;
介质温度 Medium temperature	0 ~ 140℃
使用寿命 Service life	>100K cycles
适用介质 Compatible media	水、气、水蒸汽, 二氧化碳 Water, Air, Steam, CO2
连接方式 Connection type	G1/8管螺纹接头+高压硅胶管 G1/8 pipe thread fitting/High- pressure silicone rubber tube

功能特点




Function and Characteristics

适用苏打水机或咖啡机

Suitable for soda maker or coffee maker

High Pressure Solenoid Valve

型号Model : DEV03

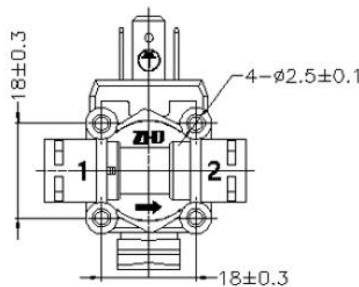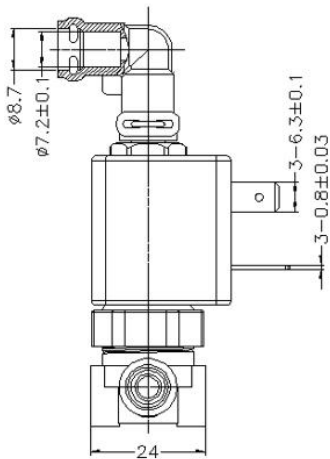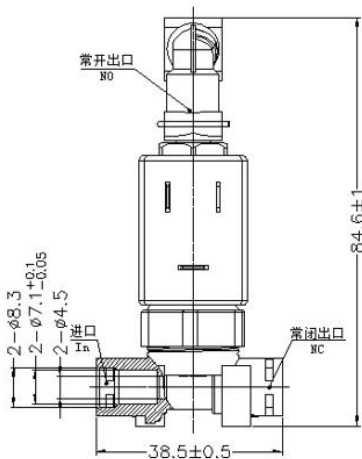

基本规格参数 Specification

电压 Voltage	DC12V/DC24V/DC36V/AC110V AC220V
适用压力 Pressure range	0~2.0MPa ;
介质温度 Medium temperature	0 ~ 140℃
使用寿命 Service life	>100K cycles
适用介质 Compatible media	水、气、水蒸汽, 二氧化碳 Water, Air, Steam, CO2
连接方式 Connection type	Φ4mm铁氟龙管 Φ4mm PTFE tube




功能特点

Function and Characteristics

适用苏打水机或咖啡机

Suitable for soda maker or coffee maker

型号Model : DEV03

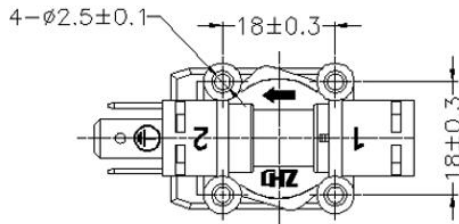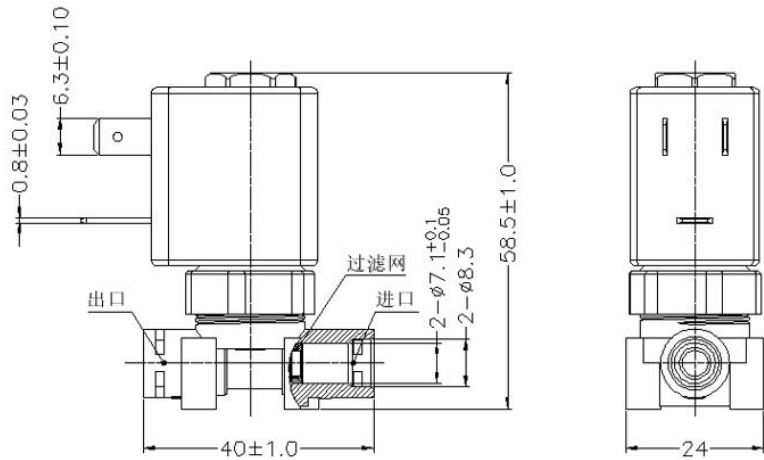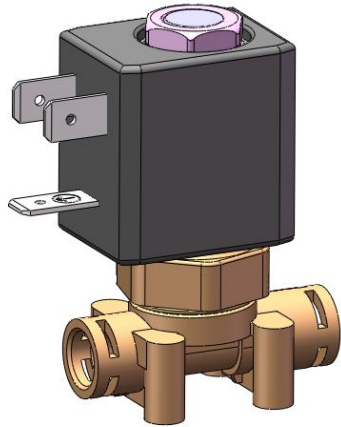

高压电磁阀 High Pressure Solenoid Valve

基本规格参数 Specification


电压 Voltage	DC12V/DC24V/DC36V/AC110V AC220V
适用压力 Pressure range	0~2.0MPa ;
介质温度 Medium temperature	0 ~ 140℃
使用寿命 Service life	>100K cycles
适用介质 Compatible media	水、气、水蒸汽, 二氧化碳 Water, Air, Steam, CO2
连接方式 Connection type	Φ4mm铁氟龙管 Φ4mm PTFE tube

功能特点 Function and Characteristics

适用苏打水机或咖啡机
Suitable for soda maker or coffee maker



净水电磁阀系列

Water Purification Solenoid Valve Series

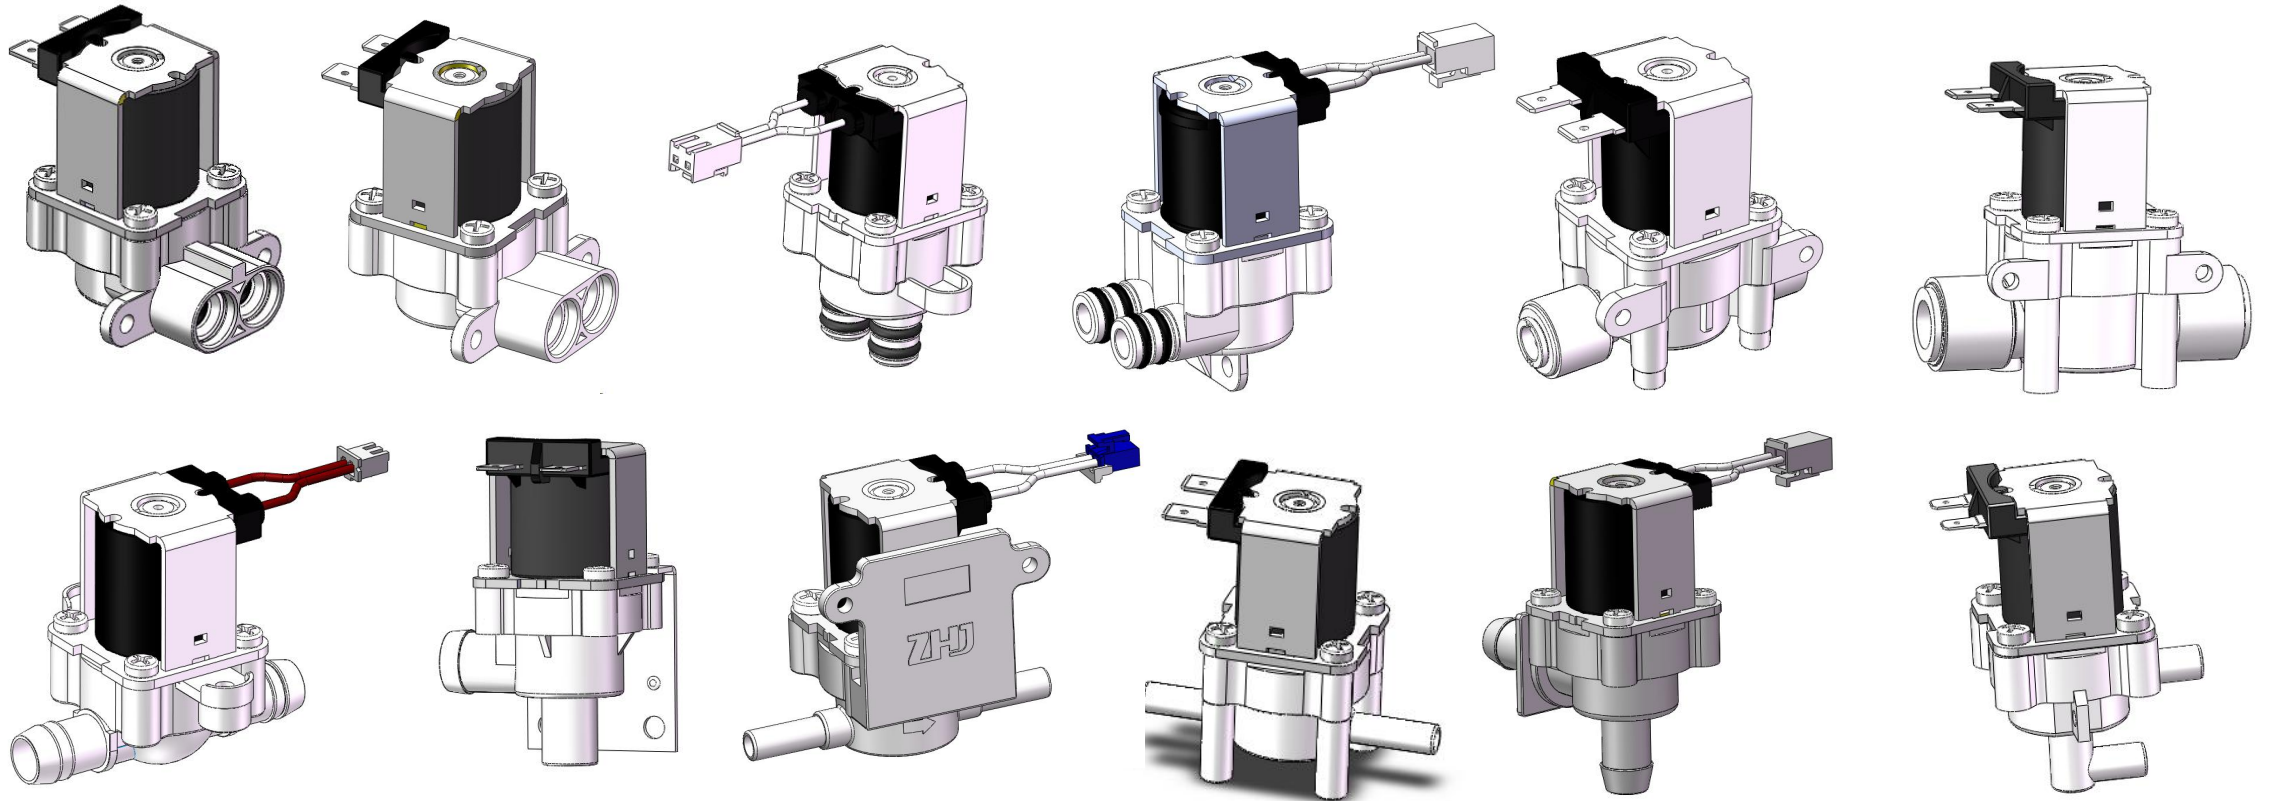

水路板废水电磁阀
Water Manifold Wastewater Solenoid Valve

型号Model : DEV01-W11

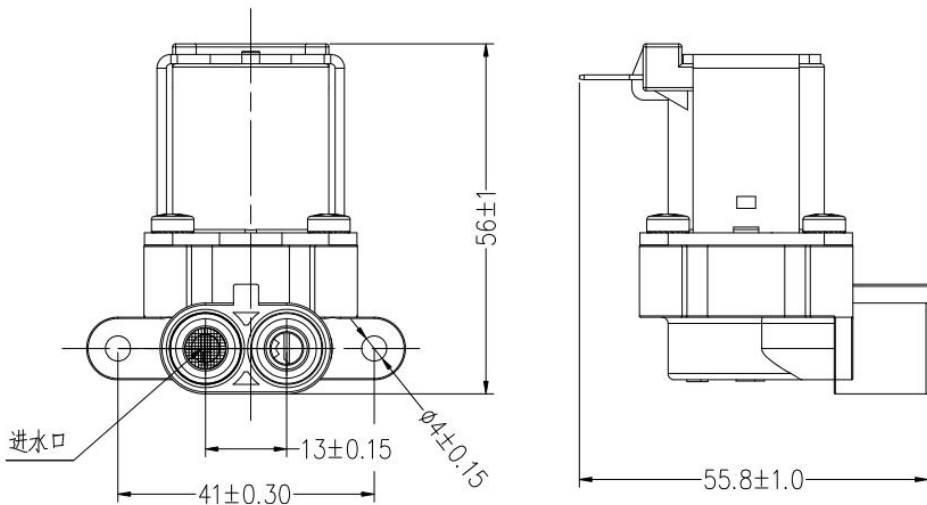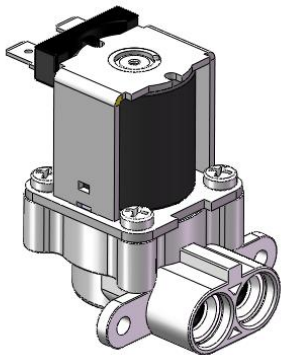

基本规格参数 Specification

电压 Voltage	DC12V/DC24V/DC36V/Others
适用水压 Water pressure range	0.02 ~ 1.2MPa
介质温度 Medium temperature	0 ~ 40℃
使用寿命 Service life	>100K cycles
流量Flow rate	0.5 ~ 15L/min
连接方式 Connection type	水路板 Manifold mounting



功能特点
Function and Characteristics

水路板连接，安装方便。进出水口同侧，体积小，可自带滤网。
废水阀流量可定制；0.42MPa-300CC/min及其他

Manifold mounting, easy installation. Inlet and outlet on the same side, small size, equipped with filter screen.
Customization can be acceptable; 0.42MPa-300 cc /min and others.

Water Manifold Inlet Solenoid Valve

型号Model : DEV01-I11

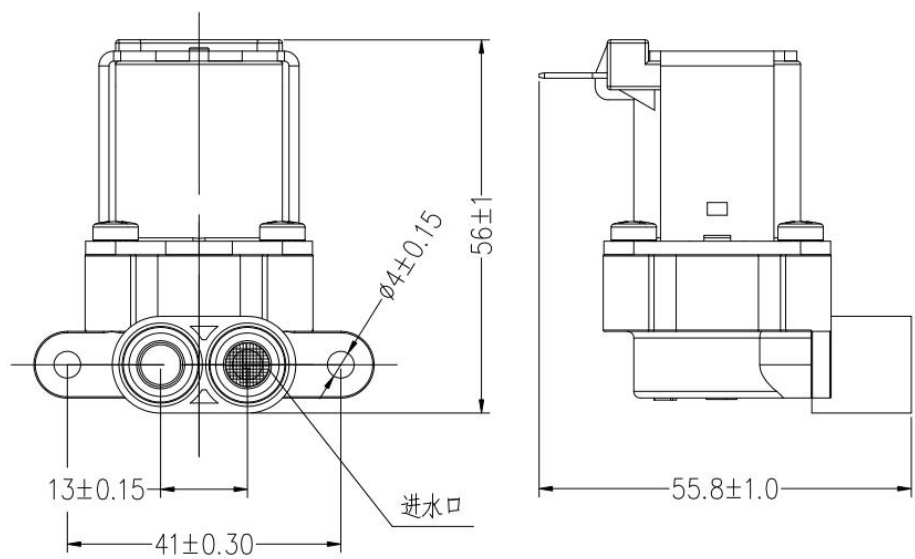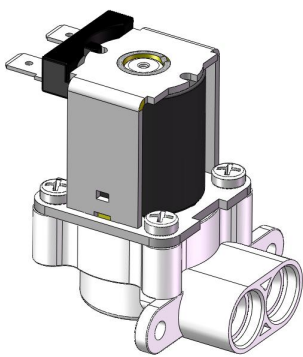

基本规格参数 Specification

电压 Voltage	DC12V/DC24V/DC36V/Others
适用水压 Water pressure range	0.02 ~ 1.2MPa
介质温度 Medium temperature	0 ~ 40℃
使用寿命 Service life	>100K cycles
流量Flow rate	0.5 ~ 15L/min
连接方式 Connection type	水路板 Manifold mounting



功能特点
Function and Characteristics

水路板连接，安装方便。进出水口同侧，体积小，自带滤网。

Manifold mounting, easy installation. Inlet and outlet on the same side, small size, equipped with filter screen.

Water Manifold Solenoid Valve

型号Model : DEV01-I05/W05

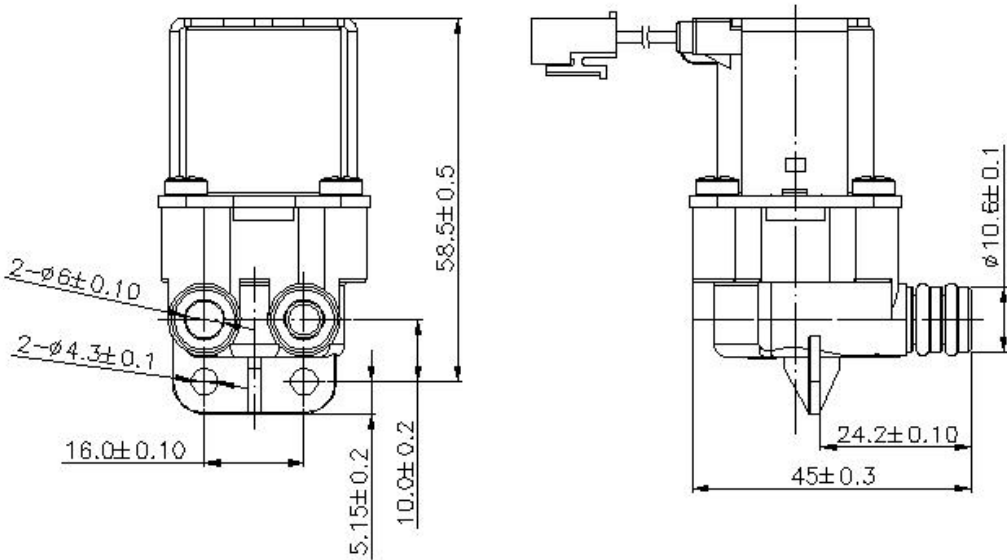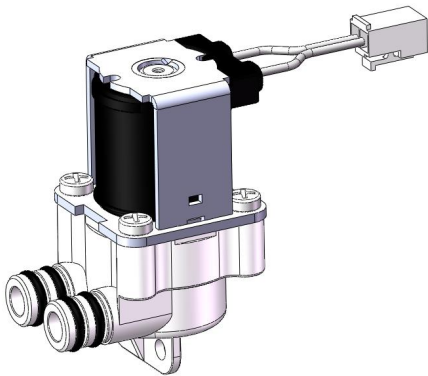

基本规格参数 Specification

电压 Voltage	DC12V/DC24V/DC36V/Others
适用水压 Water pressure range	0.02 ~ 1.2MPa
介质温度 Medium temperature	0 ~ 40℃
使用寿命 Service life	>100K cycles
流量Flow rate	0.5 ~ 20L/min
连接方式 Connection type	水路板 Manifold mounting



功能特点
Function and Characteristics

水路板连接，安装方便。节省空间。
废水阀流量可定制；0.55MPa-550CC/min及其他

Manifold mounting,easy installation. Save space.
Customization can be acceptable;0.55MPa-550 cc /min
and others.

Water Manifold Solenoid Valve

型号Model : DEV01-I21/W21

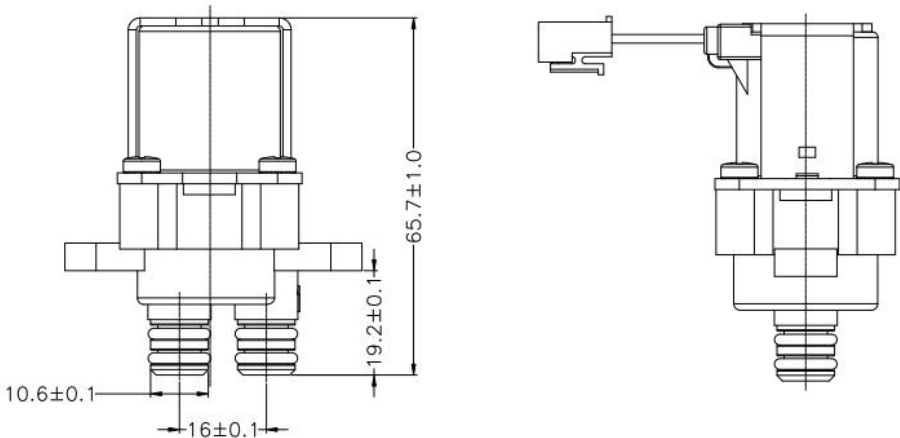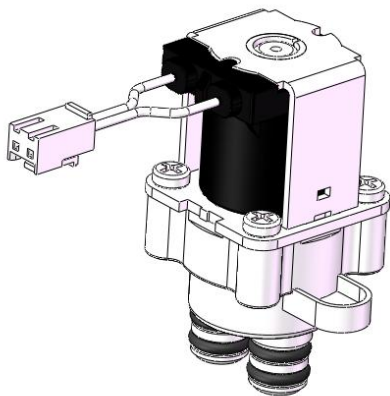

基本规格参数 Specification

电压 Voltage	DC12V/DC24V/DC36V/Others
适用水压 Water pressure range	0.02 ~ 1.2MPa
介质温度 Medium temperature	0 ~ 40℃
使用寿命 Service life	>100K cycles
流量Flow rate	0.5 ~ 20L/min
连接方式 Connection type	水路板 Manifold mounting



功能特点
Function and Characteristics

水路板连接，安装方便。节省空间。
废水阀流量可定制；0.42MPa-300CC/min及其他

Manifold mounting, easy installation. Save space.
Customization can be acceptable;0.42MPa-300 cc /min and others.

二分快插电磁阀 1/4" Quick Connect Solenoid Valve

型号Model : DEV01-I01/W01

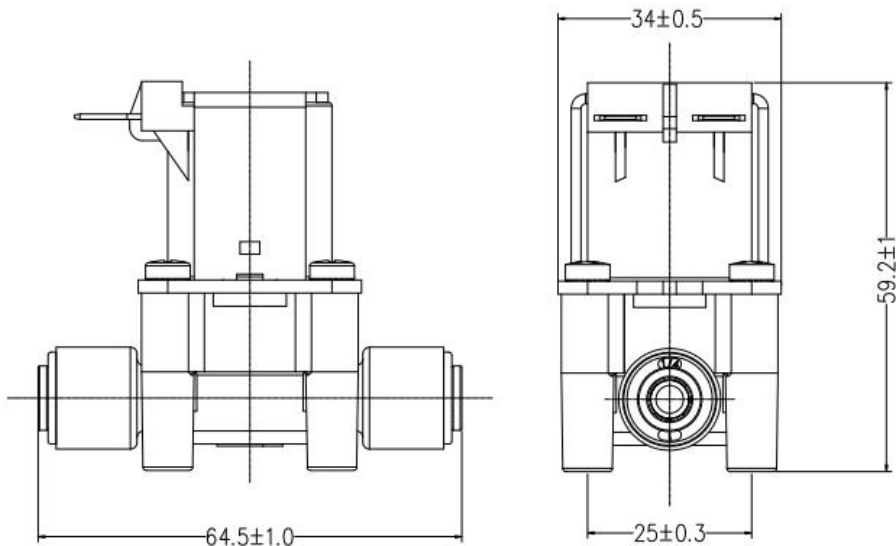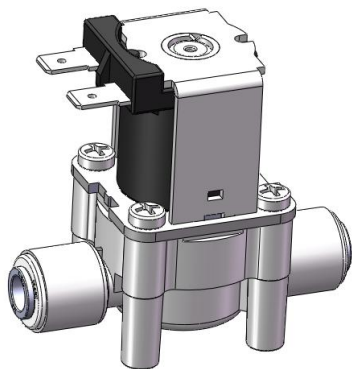

基本规格参数 Specification

电压 Voltage	DC12V/DC24V/36V/Others
适用水压 Water pressure range	0.02 ~ 1.2MPa
介质温度 Medium temperature	0 ~ 40℃
使用寿命 Service life	>100K cycles
流量Flow rate	0.5 ~ 20L/min
连接方式 Connection type	二分快接/250端子 1/4" Quick Connect/ 250 Terminal




功能特点 Function and Characteristics

二分快接，安装方便。自带滤网，一体过滤；
废水阀流量可定制；常规0.42MPa-300CC/min及其他

1/4" quick connect, easy installation. Built-in filter for integrated filtration;
Customizable wastewater valve flow rate; Standard specifications: 0.42 MPa - 300 cc/min, among others.

1/4" Quick Connect Solenoid Valve

型号Model : DEV01-I22/W22

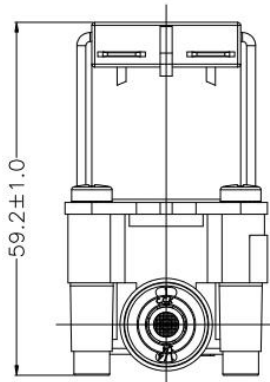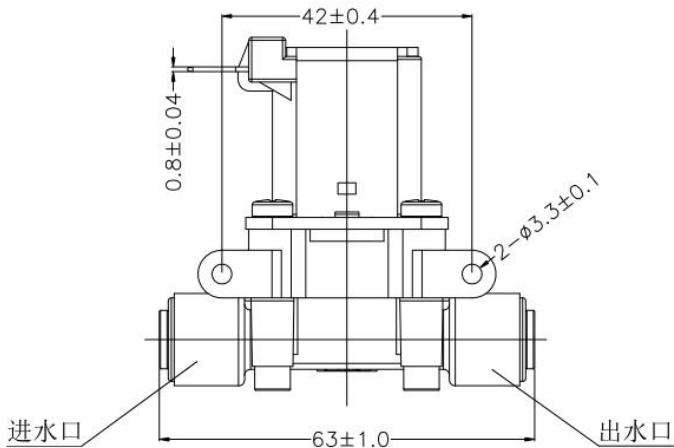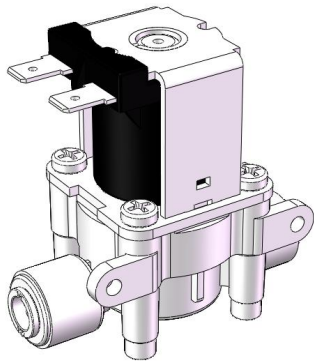

基本规格参数 Specification

电压 Voltage	DC12V/DC24V/36V/Others
适用水压 Water pressure range	0.02 ~ 1.2MPa
介质温度 Medium temperature	0 ~ 40℃
使用寿命 Service life	>100K cycles
流量Flow rate	0.5 ~ 20L/min
连接方式 Connection type	二分快接/250端子 1/4" Quick Connect/ 250 Terminal



功能特点
Function and Characteristics

二分快接，安装方便。自带滤网，一体过滤；
废水阀流量可定制；常规0.42MPa-300CC/min及其他

1/4" quick connect, easy installation. Built-in filter for
integrated filtration;
Customizable wastewater valve flow rate; Standard
specifications: 0.42 MPa - 300 cc/min, among others.

3/8" Quick Connect Solenoid Valve

型号Model : DEV01-I19/W19

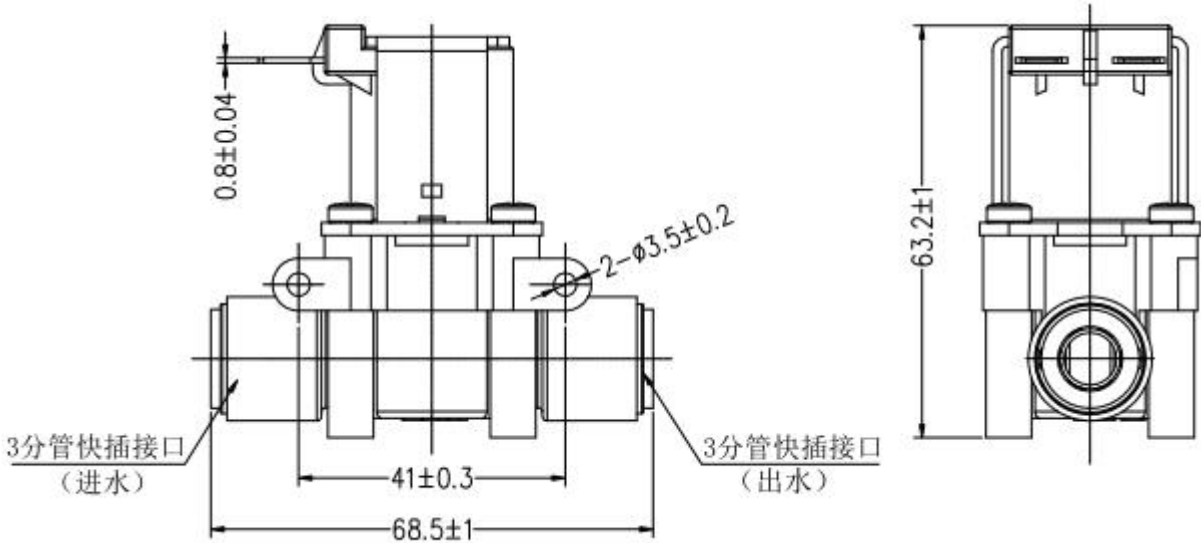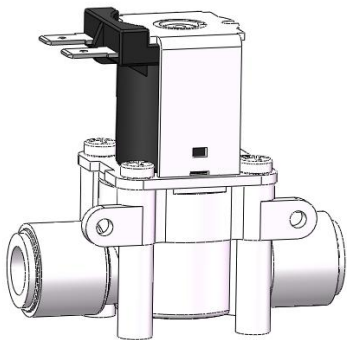

基本规格参数 Specification



电压 Voltage	DC12V/DC24V/DC36V/Others
适用水压 Water pressure range	0.02 ~ 1.2MPa
介质温度 Medium temperature	0 ~ 40℃
使用寿命 Service life	>100K cycles
流量Flow rate	0.5 ~ 20L/min
连接方式 Connection type	三分快接/250端子 3/8" Quick Connect/250 Terminal

**功能特点
Function and Characteristics**

三分快接，安装方便。通量大
3/8" quick connect, easy installation, large flow.

二分接杆电磁阀 1/4" Stem-Connection Solenoid Valve

型号Model : DEV01-I03/W03

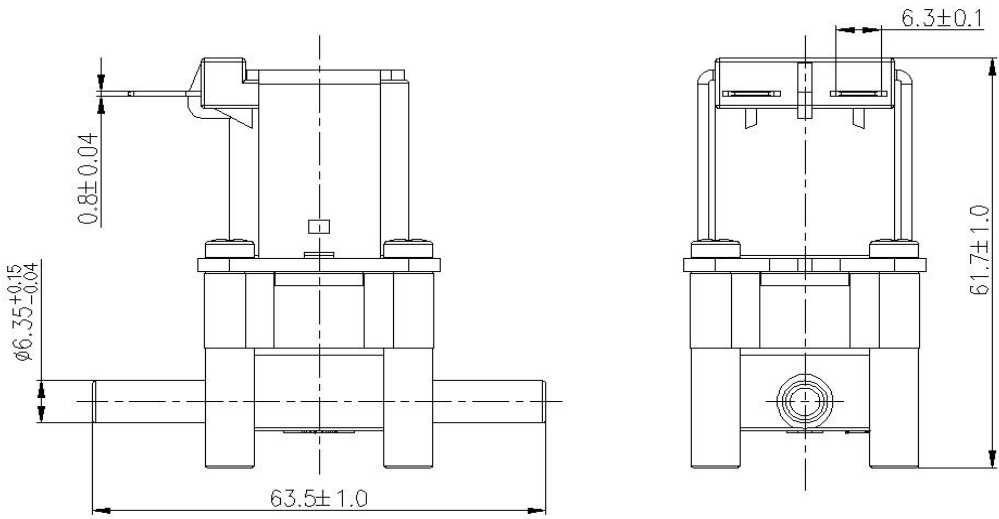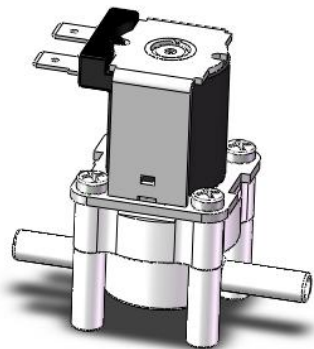

基本规格参数 Specification

电压 Voltage	DC12V/DC24V/DC36V/Others
适用水压 Water pressure range	0.02 ~ 1.2MPa
介质温度 Medium temperature	0 ~ 40°C
使用寿命 Service life	>100K cycles
流量Flow rate	0.5 ~ 15L/min
连接方式 Connection type	二分接杆 1/4" stem connection type



功能特点 Function and Characteristics

二分接杆，安装方便。
废水阀流量可定制；0.42MPa-300CC/min及其他

1/4" stem connection type, easy installation.
Customizable wastewater valve flow rate;
0.42MPa-300 cc /min and others.

二分接杆电磁阀 1/4" Stem-Connection Solenoid Valve

型号Model : DEV01-I20/W20

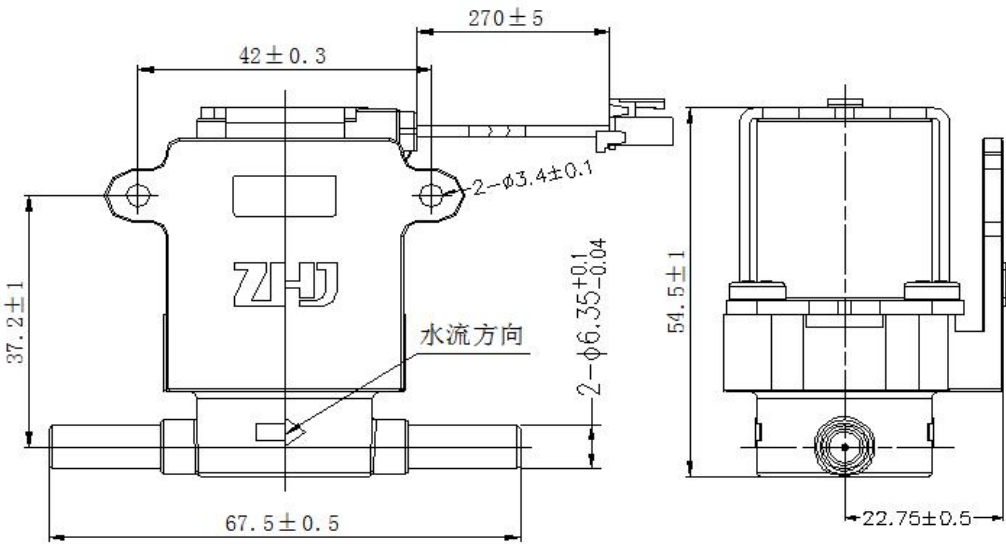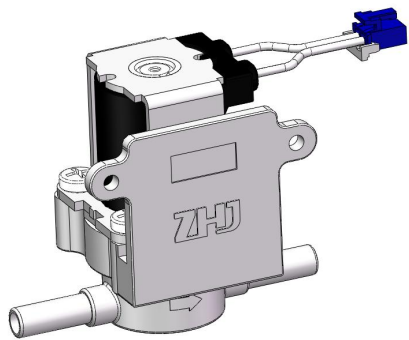

基本规格参数 Specification



电压 Voltage	DC12V/DC24V/DC36V/Others
适用水压 Water pressure range	0.02 ~ 1.2MPa
介质温度 Medium temperature	0 ~ 40℃
使用寿命 Service life	>100K cycles
流量Flow rate	0.5 ~ 15L/min
连接方式 Connection type	二分接杆 1/4" stem connection type

功能特点 Function and Characteristics

二分接杆，安装方便。
废水阀流量可定制；0.42MPa-300CC/min及其他

1/4" stem connection type, easy installation.
Customizable wastewater valve flow rate;
0.42MPa-300 cc /min and others.

型号Model : DEV01-O10

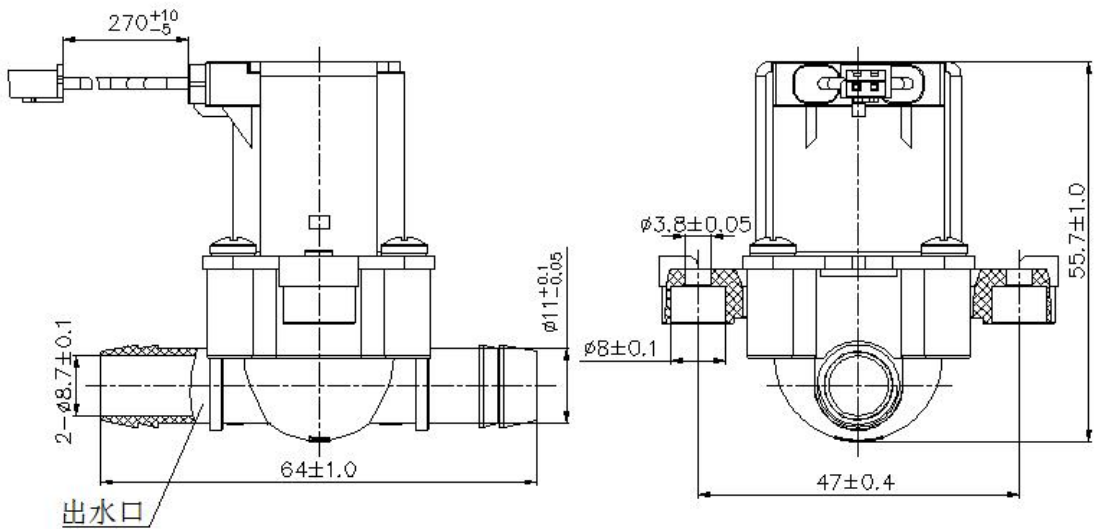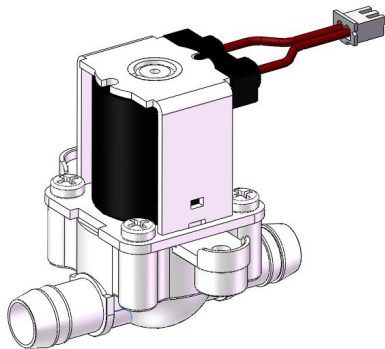

基本规格参数 Specification



电压 Voltage	DC12V/DC24V/DC36V/Others
适用水压 Water pressure range	0 ~ 0.003MPa
介质温度 Medium temperature	0 ~ 100℃
使用寿命 Service life	>100K cycles
流量Flow rate	0.003MPa≥2.5L/min
连接方式 Connection type	软管连接 Hose Connection

功能特点
Function and Characteristics

安装方便，流量大。
Easy installation,large flow.

大流量放水电磁阀 High-Flow Drain Solenoid Valve

型号Model : DEV01-008

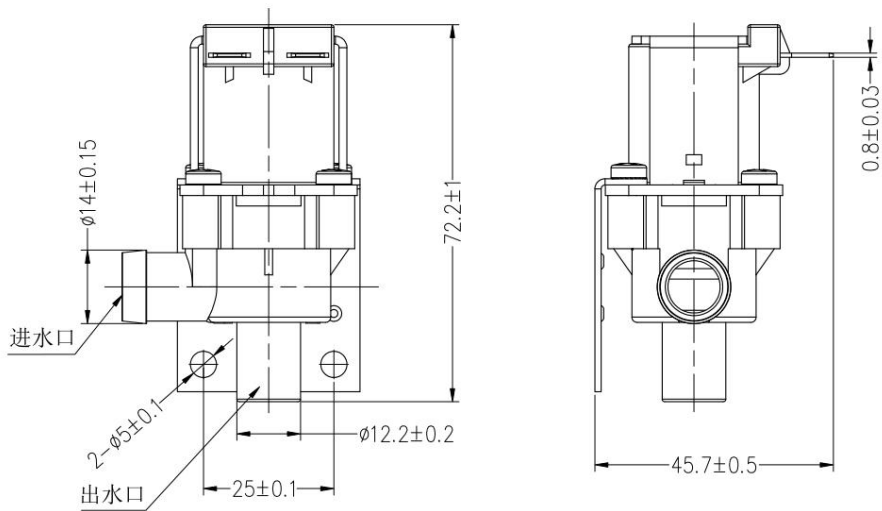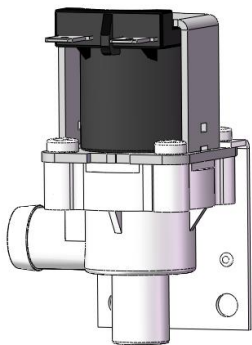

基本规格参数 Specification



电压 Voltage	DC12V/DC24V/DC36V/Others
适用水压 Water pressure range	0 ~ 0.003MPa
介质温度 Medium temperature	0 ~ 100℃
使用寿命 Service life	>100K cycles
流量Flow rate	0.003MPa≥2.5L/min
连接方式 Connection type	软管连接 Hose Connection

功能特点 Function and Characteristics

安装方便，流量大。
Easy installation, large flow.

大流量放水电磁阀 High-Flow Drain Solenoid Valve

型号Model : DEV01-002

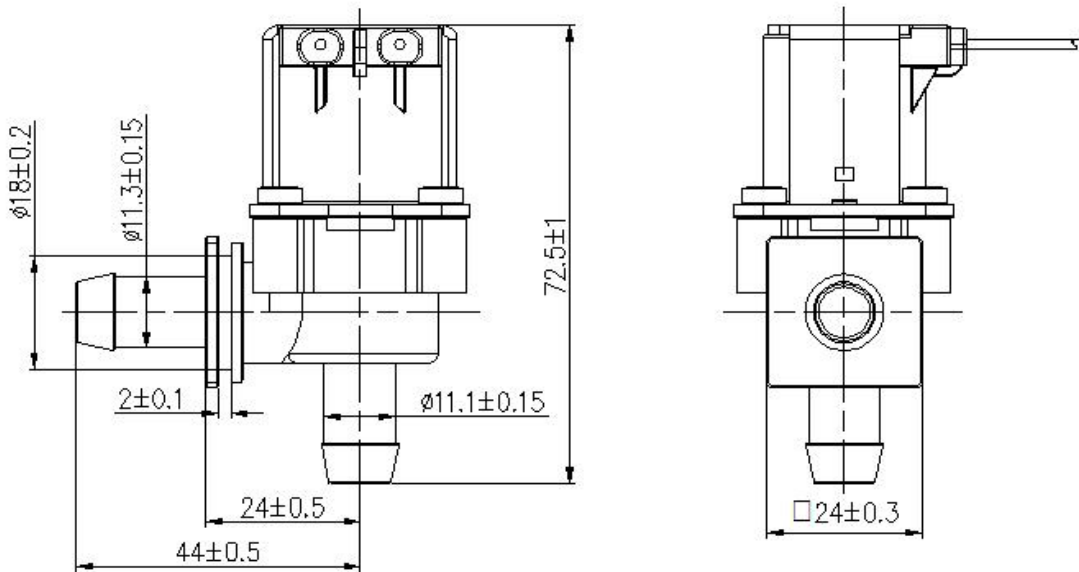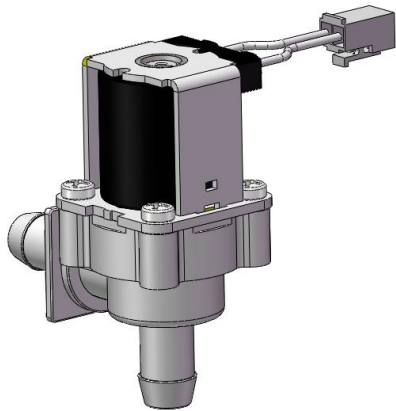

基本规格参数 Specification




电压 Voltage	DC12V/DC24V/DC36V/Others
适用水压 Water pressure range	0 ~ 0.004MPa
介质温度 Medium temperature	0 ~ 100℃
使用寿命 Service life	>100K cycles
流量 Flow rate	0.004Mpa≥2.5L/min
连接方式 Connection type	软管连接 Hose Connection

功能特点 Function and Characteristics

加装硅胶，安装方便，通径流量大。

Silicone seal for easy installation.
Full-bore design for high flow rate.

型号Model : DEV01-001

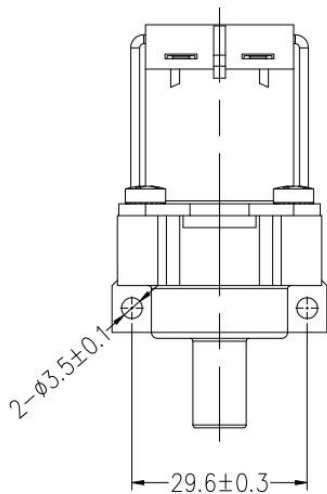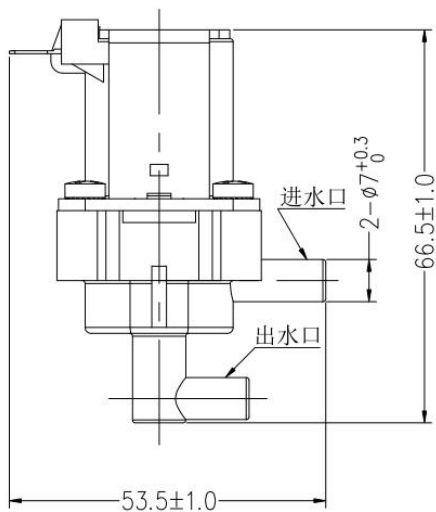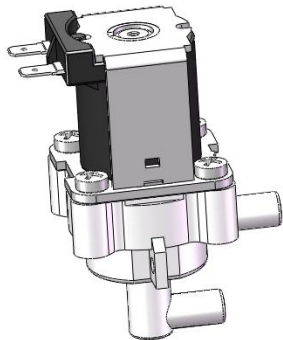





基本规格参数 Specification

电压 Voltage	DC12V/DC24V/DC36V/Others
适用水压 Water pressure range	0 ~ 0.003MPa
介质温度 Medium temperature	0 ~ 100℃
使用寿命 Service life	>100K cycles
流量Flow rate	0.003MPa≥0.6L/min
连接方式 Connection type	接杆 Stem Connection

功能特点
Function and Characteristics

接杆，安装方便，大流量。
Stem connection, easy installation, large flow.

型号Model : DEV01

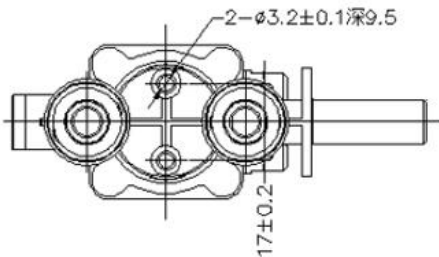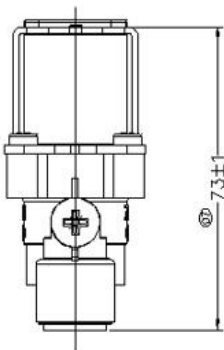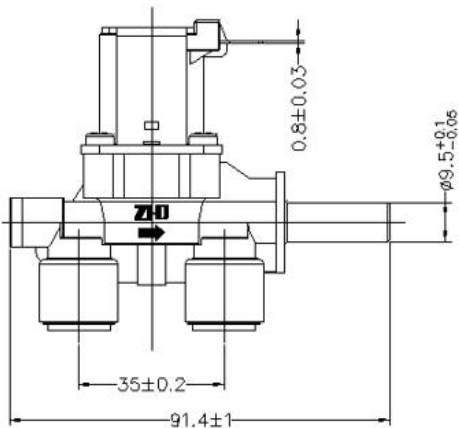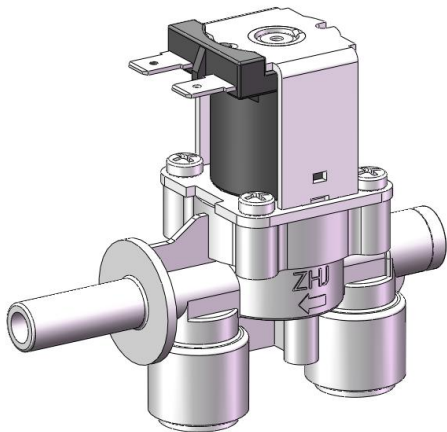

基本规格参数 Specification


电压 Voltage	DC12V/DC24V/DC36V
适用水压 Water pressure range	0 ~ 0.8MPa
介质温度 Medium temperature	0 ~ 40℃
使用寿命 Service life	>100K cycles
流量Flow rate	水 Water
连接方式 Connection type	三分接杆/三分快接 3/8" stem connection type/ 3/8" quick connect

功能特点
Function and Characteristics




适用净饮水机系统水流方向切换或判断
Applicable to switching or determining the water flow direction of drinking water purifier systems.

直动电磁阀系列

Direct-Acting Solenoid Valve Series

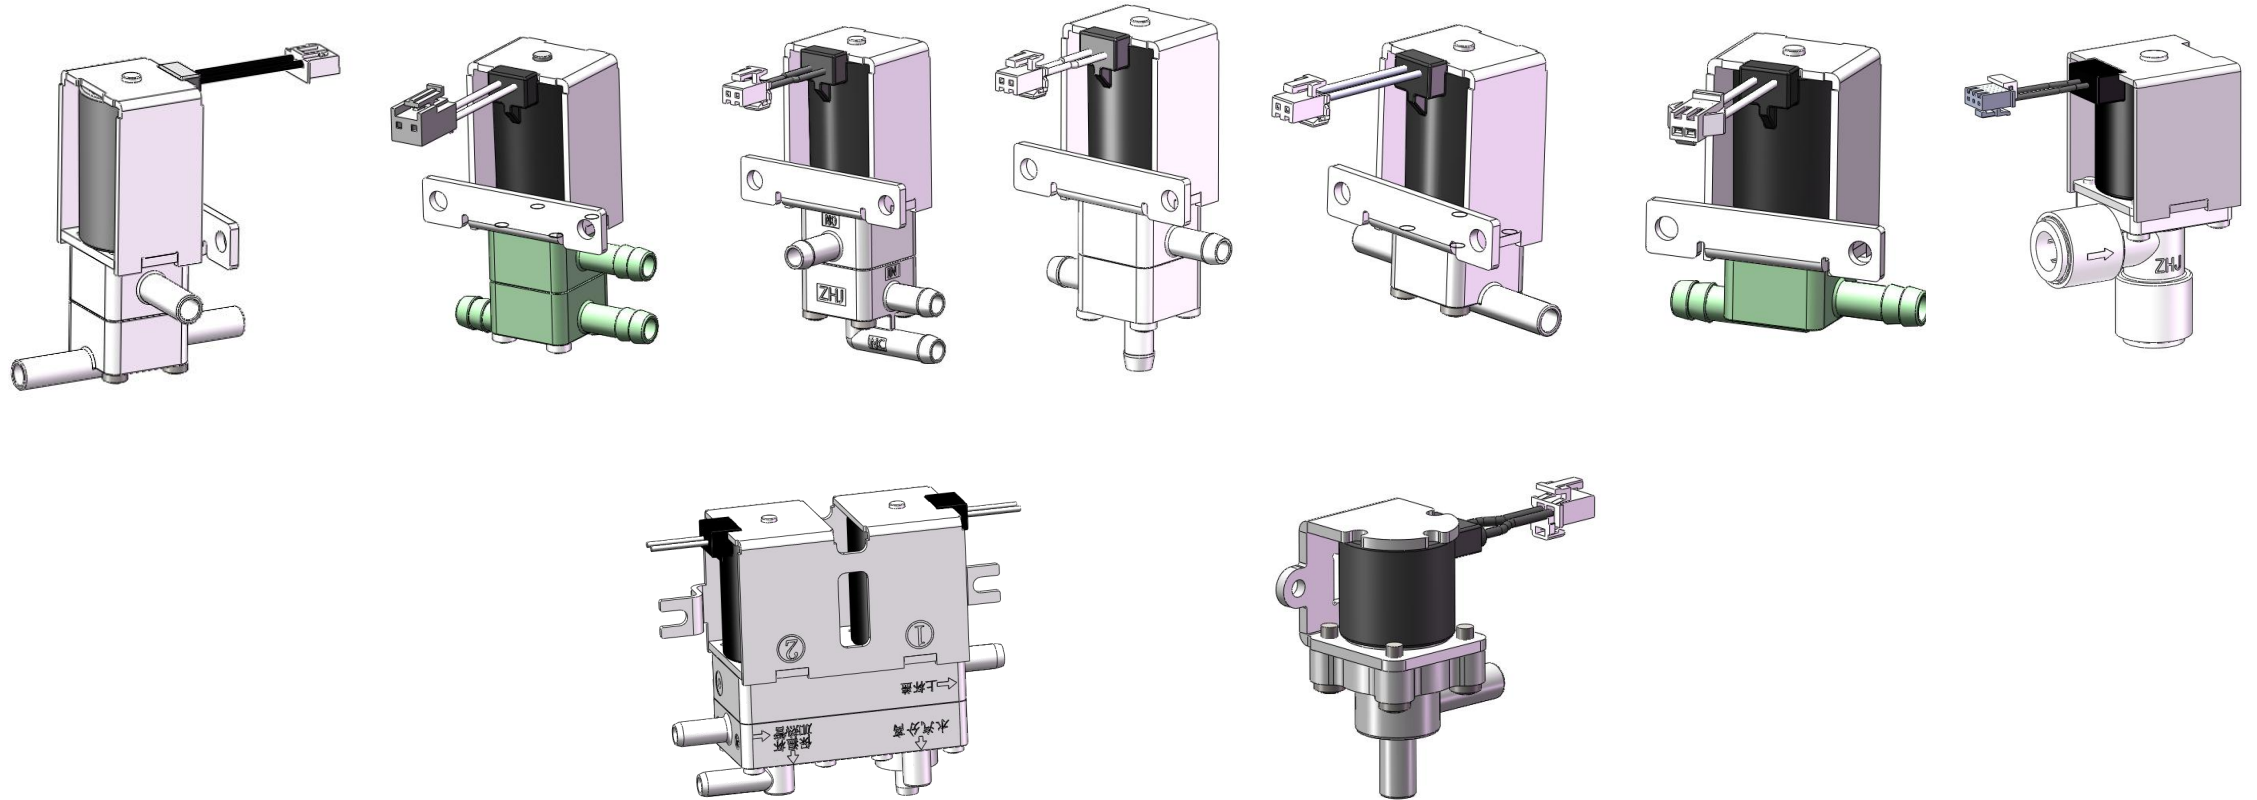

型号Model : DEV01

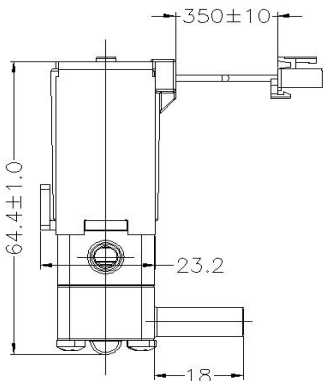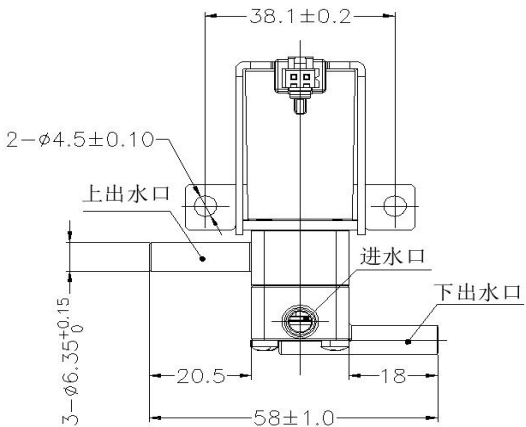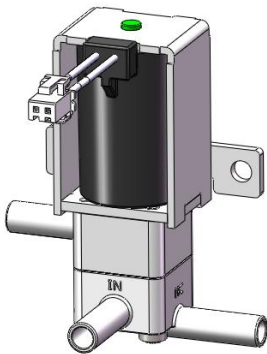

基本规格参数 Specification




电压 Voltage	DC12V/DC24V/DC36V
适用水压 Water pressure range	0 ~ 0.08MPa
介质温度 Medium temperature	0 ~ 40℃
使用寿命 Service life	>100K cycles
适用介质 Medium texture	水 Water
连接方式 Connection type	二分接杆 1/4" stem connection type

功能特点
Function and Characteristics

适用净饮水机系统水流方向切换

Applicable to switching the water flow direction of drinking water purifier systems.

型号Model : DEV01-002

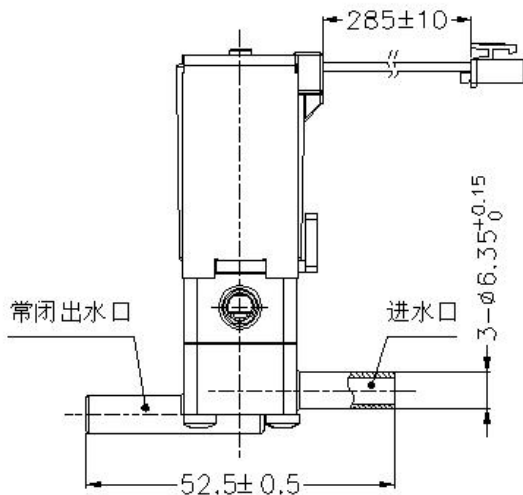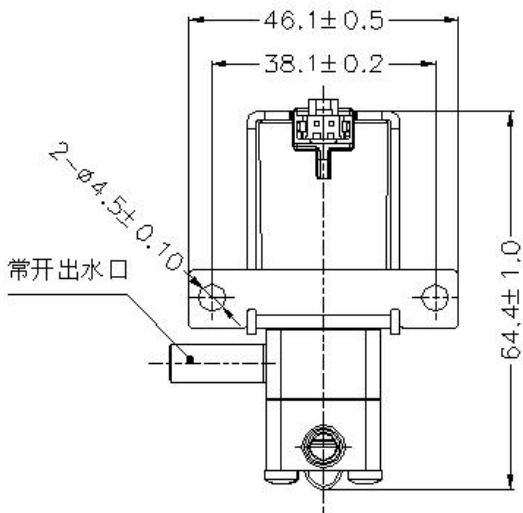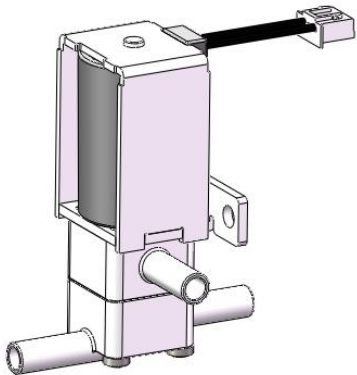

基本规格参数 Specification

电压 Voltage	DC12V/DC24V/DC36V/Others
适用水压 Water pressure range	0 ~ 0.10MPa
介质温度 Medium temperature	0 ~ 100℃
使用寿命 Service life	>100K cycles
流量Flow rate	0.05Mpa≥500ml/min
连接方式 Connection type	二分接杆 1/4" stem connection type




功能特点
Function and Characteristics

二分接杆，安装方便，连接可靠；
一进二出，通电切换

1/4" stem connection type, easy installation, reliable connection; 1 IN / 2 OUT, switches when powered on.

三通电磁阀
3-way Solenoid Valve

型号Model : DEV01-O07

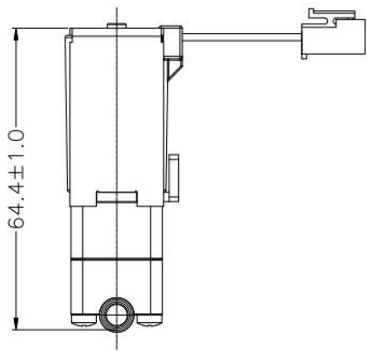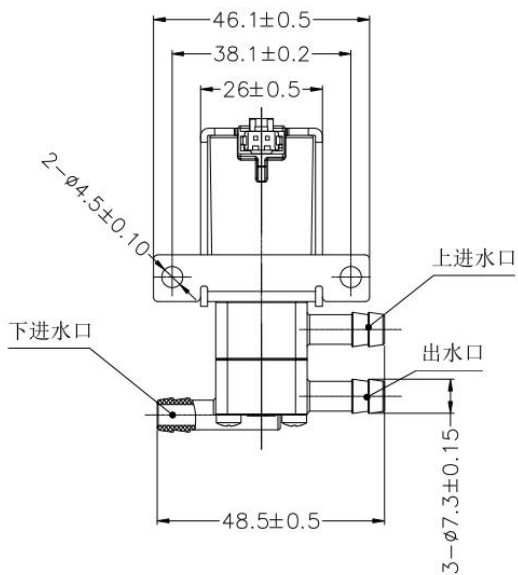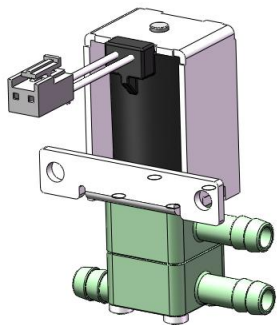

基本规格参数 Specification


电压 Voltage	DC12V/DC24V/DC36V/Others
适用水压 Water pressure range	0 ~ 0.01MPa
介质温度 Medium temperature	0 ~ 100℃
使用寿命 Service life	>100K cycles
流量Flow rate	0.05Mpa≥500ml/min
连接方式 Connection type	宝塔 Hose Barb Connection

功能特点
Function and Characteristics

宝塔接头，安装方便，连接可靠；
二进一出，通电切换

Hose barb connection, easy installation, reliable connection; 2 IN / 1 OUT, switches when powered on.

型号Model : DEV01-007

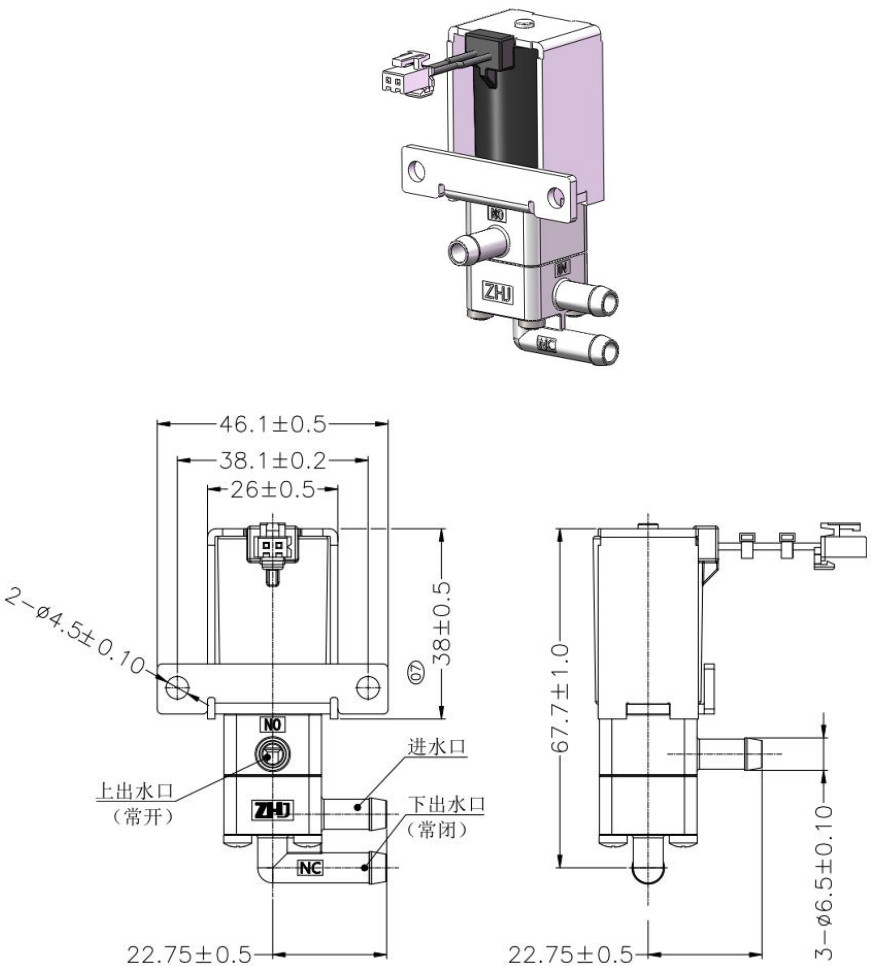

基本规格参数 Specification


电压 Voltage	DC12V/DC24V/DC36V/Others
适用水压 Water pressure range	0 ~ 0.10MPa
介质温度 Medium temperature	0 ~ 100℃
使用寿命 Service life	>100K cycles
流量Flow rate	0.05Mpa≥500ml/min
连接方式 Connection type	宝塔 Hose Barb Connection

功能特点
Function and Characteristics

宝塔接头，安装方便，连接可靠；
一进二出，通电切换

Hose barb connection, easy installation, reliable connection; 1 IN / 2 OUT, switches when powered on.

型号Model : DEV01-007

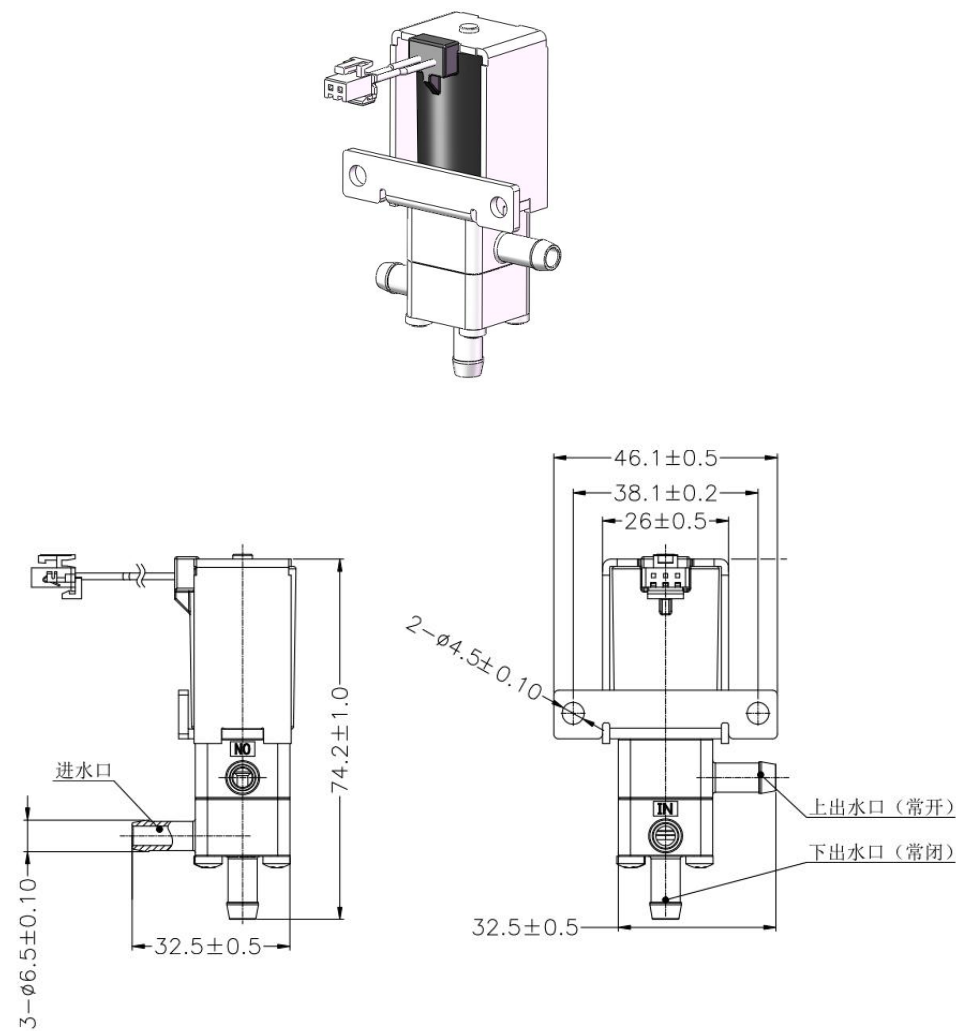

基本规格参数 Specification

电压 Voltage	DC12V/DC24V/DC36V/Others
适用水压 Water pressure range	0 ~ 0.10MPa
介质温度 Medium temperature	0 ~ 100℃
使用寿命 Service life	>100K cycles
流量Flow rate	0.05Mpa≥500ml/min
连接方式 Connection type	宝塔 Hose Barb Connection




功能特点
Function and Characteristics

宝塔接头，安装方便，连接可靠；
一进二出，通电切换

Hose barb connection, easy installation, reliable connection; 1 IN / 2 OUT, switches when powered on.

二通电磁阀
2-way Solenoid Valve

型号Model : DEV01-002

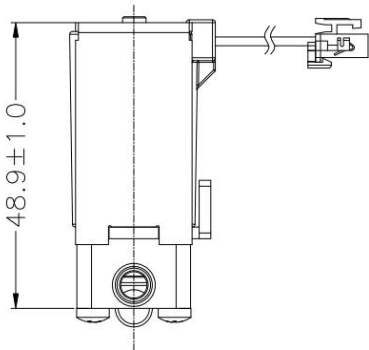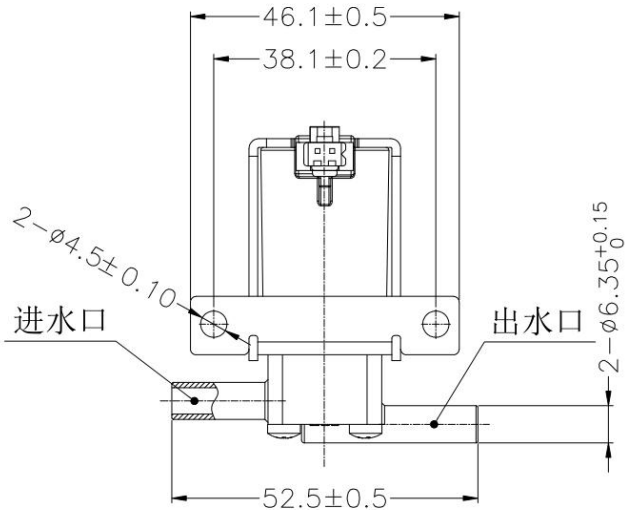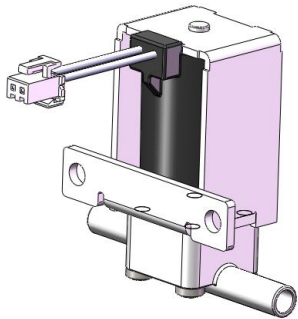

基本规格参数 Specification

电压 Voltage	DC12V/DC24V/DC36V/Others
适用水压 Water pressure range	0 ~ 0.01MPa
介质温度 Medium temperature	0 ~ 100℃
使用寿命 Service life	>100K cycles
流量Flow rate	0.05Mpa≥500ml/min
连接方式 Connection type	二分接杆 1/4" stem connection type



功能特点
Function and Characteristics

二分接杆，安装方便，连接可靠；
一进一出，通电打开

1/4" stem connection type, easy installation and reliable connection. 1 IN / 1 OUT, open when powered on.

二通电磁阀
2-way Solenoid Valve

型号Model : DEV01-007

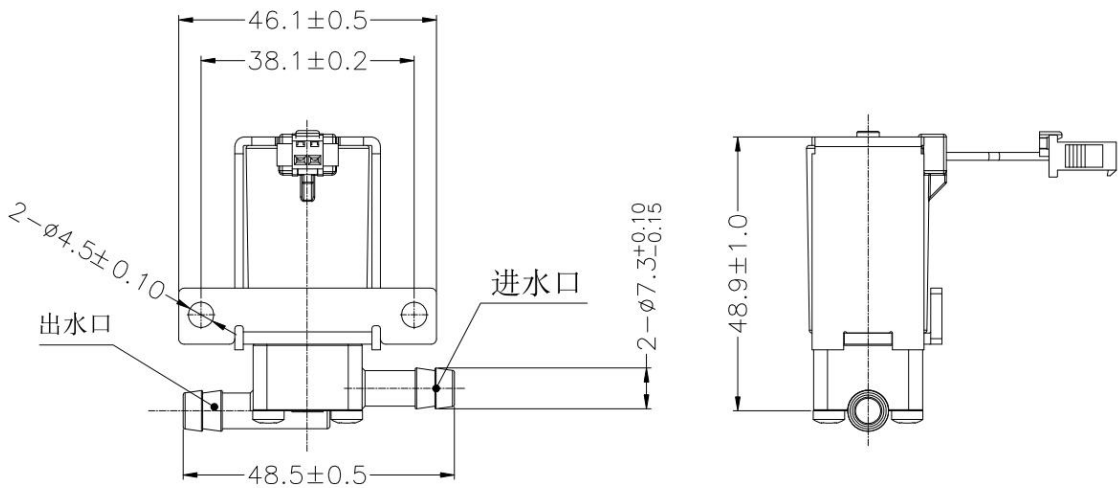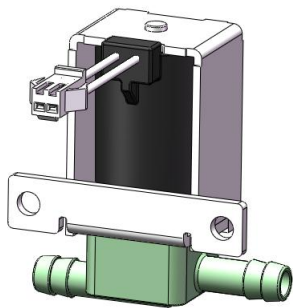

基本规格参数 Specification

电压 Voltage	DC12V/DC24V/DC36V/Others
适用水压 Water pressure range	0 ~ 0.01MPa
介质温度 Medium temperature	0 ~ 100℃
使用寿命 Service life	>100K cycles
流量 Flow rate	0.05Mpa≥500ml/min
连接方式 Connection type	宝塔 Hose Barb Connection



功能特点
Function and Characteristics

宝塔接头，安装方便，连接可靠；
一进一出，通电打开

Hose barb connection, easy installation and reliable connection. 1 IN / 1 OUT, open when powered on.

四通电磁阀
4-way Solenoid Valve




型号Model : DEV01-O11

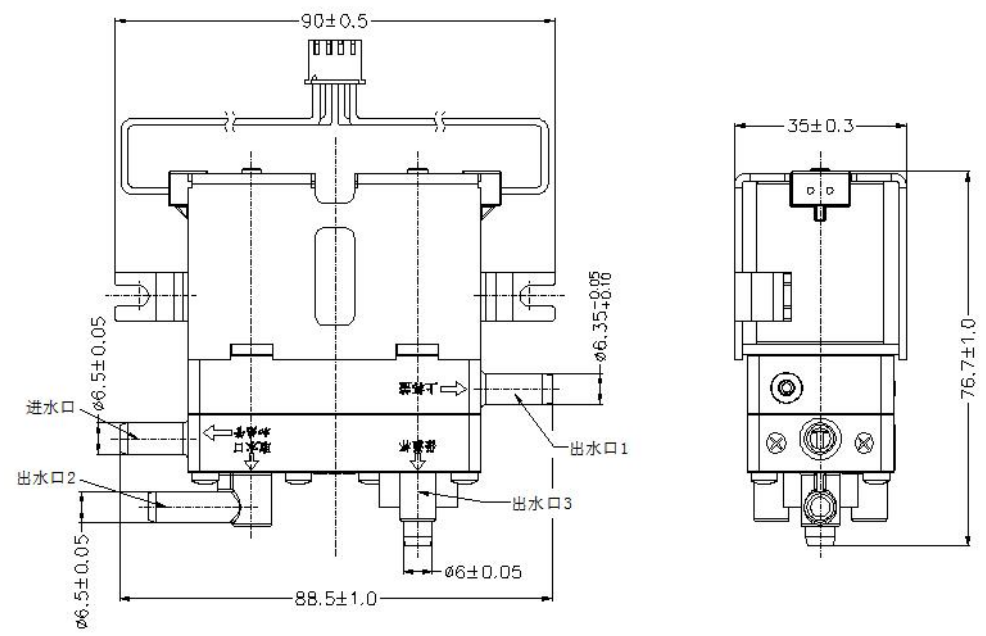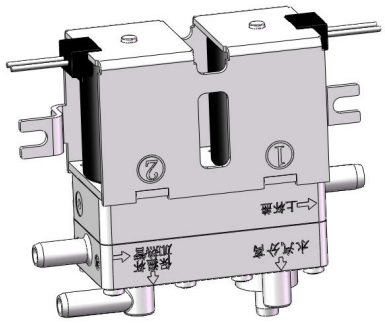

基本规格参数 Specification	
电压 Voltage	DC12V/DC24V/DC36V/Others
适用水压 Water pressure range	0 ~ 0.1MPa
介质温度 Medium temperature	0 ~ 100°C
使用寿命 Service life	>100K cycles
流量Flow rate	0.05Mpa≥ 500ml/min
连接方式 Connection type	二分接杆 1/4" stem connection type

功能特点 Function and Characteristics	
二分接杆，安装方便，连接可靠； 一进三出，通电切换	
1/4" stem connection type, easy installation and reliable connection. 1 IN / 3 OUT, switches when powered on.	

型号Model : DEV01-O151

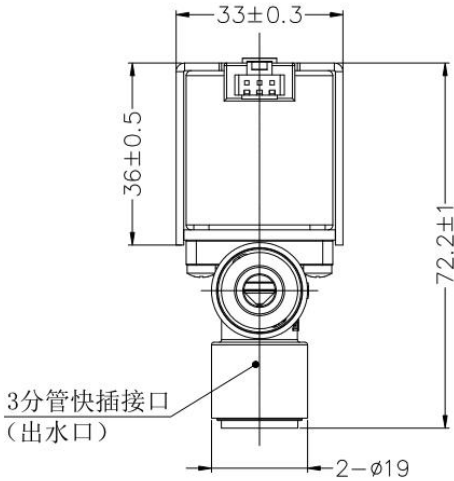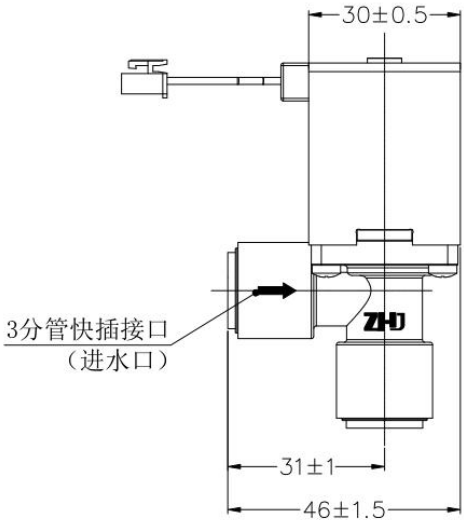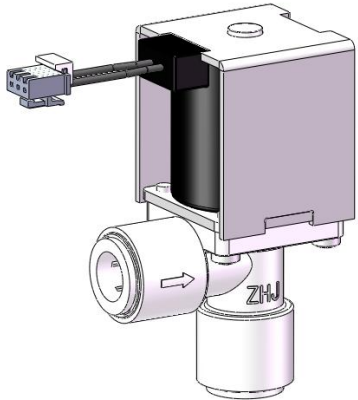



基本规格参数 Specification

电压 Voltage	DC12V/DC24V/DC36V/Others
适用水压 Water pressure range	0 ~ 0.06MPa
介质温度 Medium temperature	0 ~ 100℃
使用寿命 Service life	>100K cycles
流量Flow rate	0.06Mpa ≥3L/min
连接方式 Connection type	三分快接 3/8" quick connect

功能特点
Function and Characteristics

三分快接，安装方便，流量大
3/8" quick connect, easy installation, large flow.

型号Model : DEV01-O13

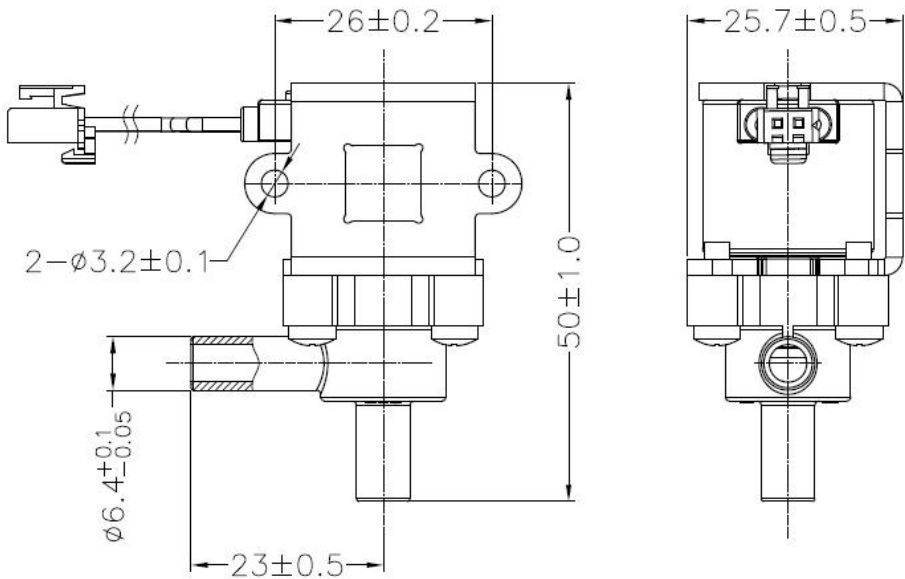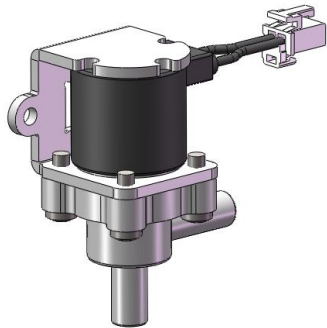





基本规格参数 Specification

电压 Voltage	DC12V/DC24V/DC36V/Others
适用水压 Water pressure range	0 ~ 0.01MPa
介质温度 Medium temperature	0 ~ 100℃
使用寿命 Service life	>100K cycles
流量Flow rate	0.01Mpa≥0.5L/min
连接方式 Connection type	二分接杆 1/4" stem connection type

功能特点
Function and Characteristics

加装硅胶，安装方便，结构紧凑。
Silicone seal for easy installation, compact structure.

型号Model : DEV01

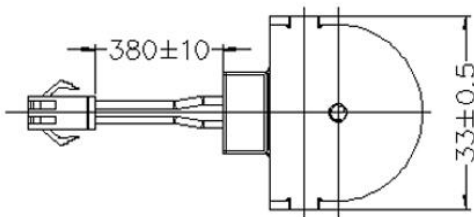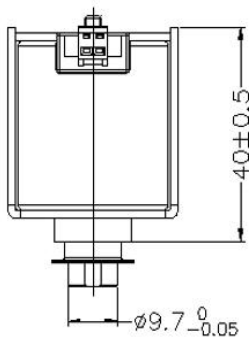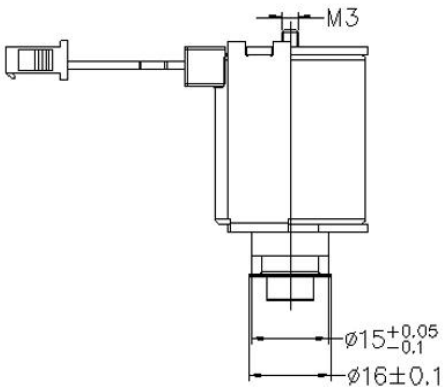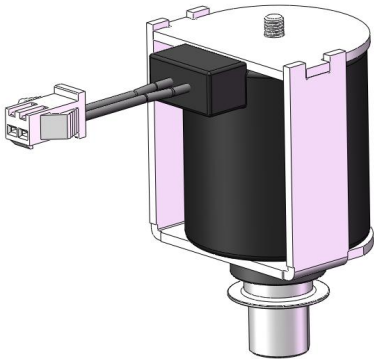

基本规格参数 Specification




电压 Voltage	DC12V/DC24V/DC36V
适用水压 Water pressure range	0 ~ 0.05MPa
介质温度 Medium temperature	0 ~ 40℃
使用寿命 Service life	>100K cycles
流量Flow rate	水 Water
连接方式 Connection type	直接装配连接 Direct assembly connection

功能特点
Function and Characteristics

适用净饮水或饮料机
Applicable to water purifiers, beverage dispenser

高压开关系列



High Pressure Switch Series

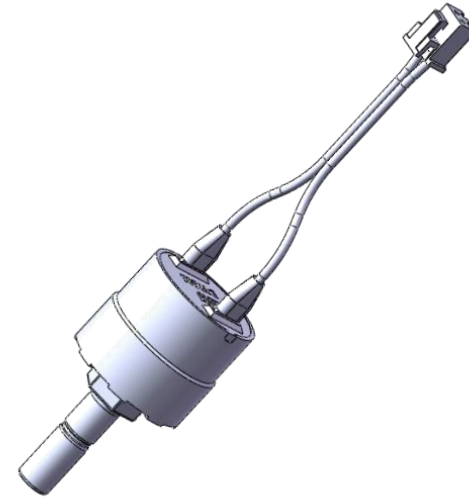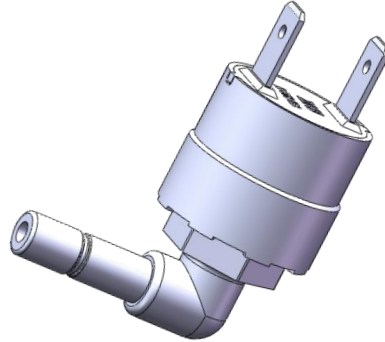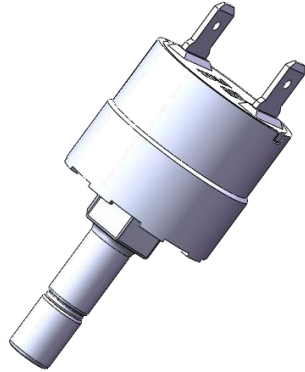

DWS02

压力开关
High Pressure Switch

型号Model : DWS02

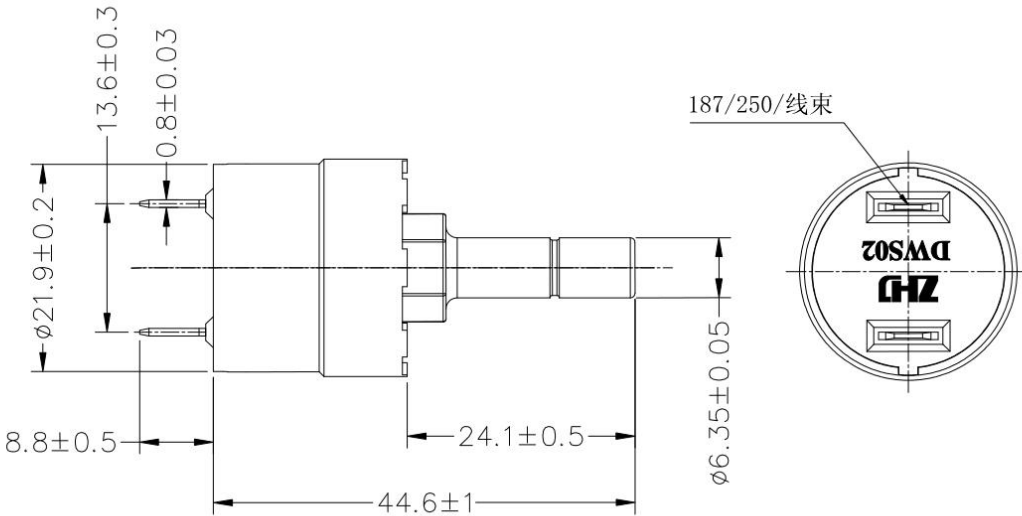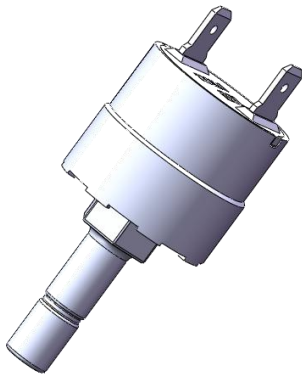



基本规格参数 Specification

电压 Voltage	DC24V/AC250/1A /Others
适用水压 Water pressure range	0.09 ~ 0.26MPa、 0.1 ~ 0.3MPa
介质温度 Medium temperature	0 ~ 100℃
使用寿命 Service life	>100K cycles
连接方式 Connection type	二分接杆 1/4" stem connection type

功能特点
Function and Characteristics

接杆连接，体积结构小，安装方便；
Stem connection type, small size , easy installation.

型号Model : DWS02

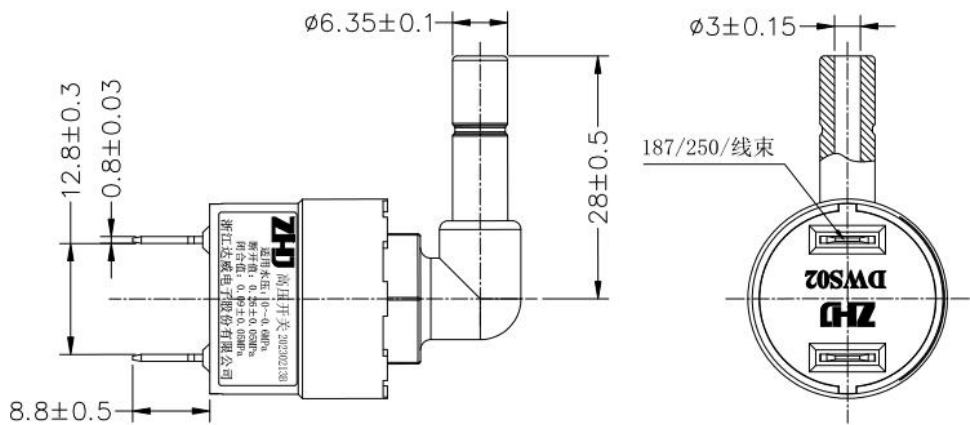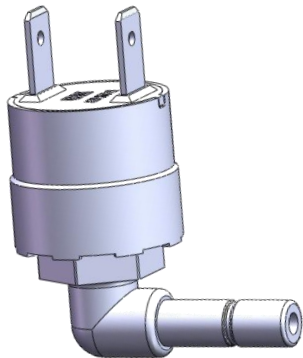

基本规格参数 Specification


电压 Voltage	DC24V/AC250/1A /Others
适用水压 Water pressure range	0.09 ~ 0.26MPa、 0.1 ~ 0.3MPa
介质温度 Medium temperature	0 ~ 100℃
使用寿命 Service life	>100K cycles
连接方式 Connection type	二分接杆 1/4" stem connection type

功能特点
Function and Characteristics

接杆连接，体积结构小，安装方便；
Stem connection type, small size , easy installation.

压力开关 High Pressure Switch

型号Model : DWS02

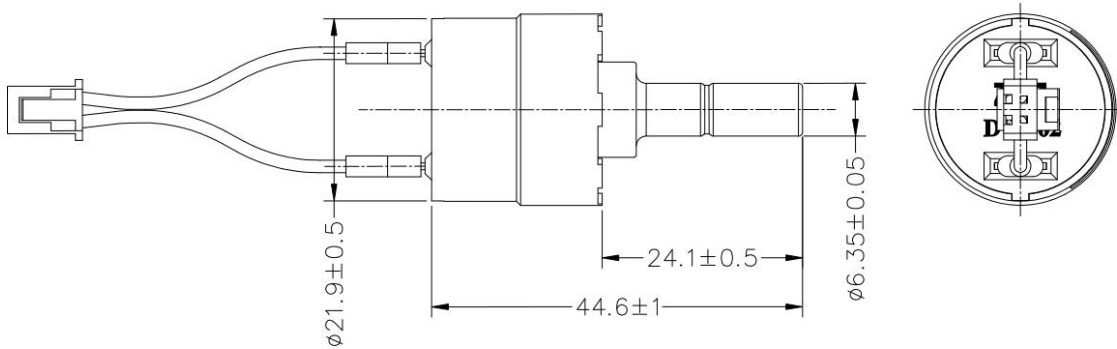

基本规格参数 Specification




电压 Voltage	DC24V/AC250/1A /Others
适用水压 Water pressure range	0.09 ~ 0.26MPa、 0.1 ~ 0.3MPa
介质温度 Medium temperature	0 ~ 100℃
使用寿命 Service life	>100K cycles
连接方式 Connection type	二分接杆 1/4" stem connection type

功能特点 Function and Characteristics

接杆连接，体积结构小，安装方便；
Stem connection type, small size , easy installation.



单向阀系列

Check Valve Series

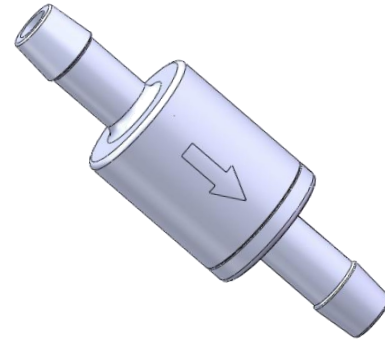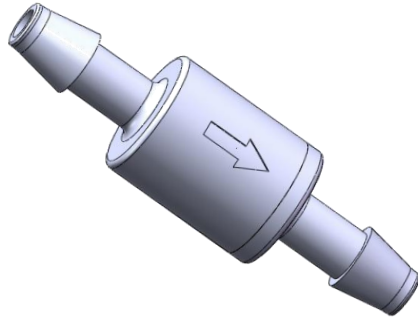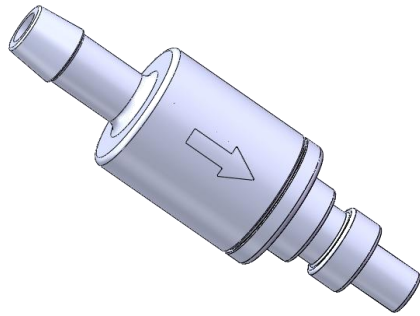

DEV01

型号Model : DEV01

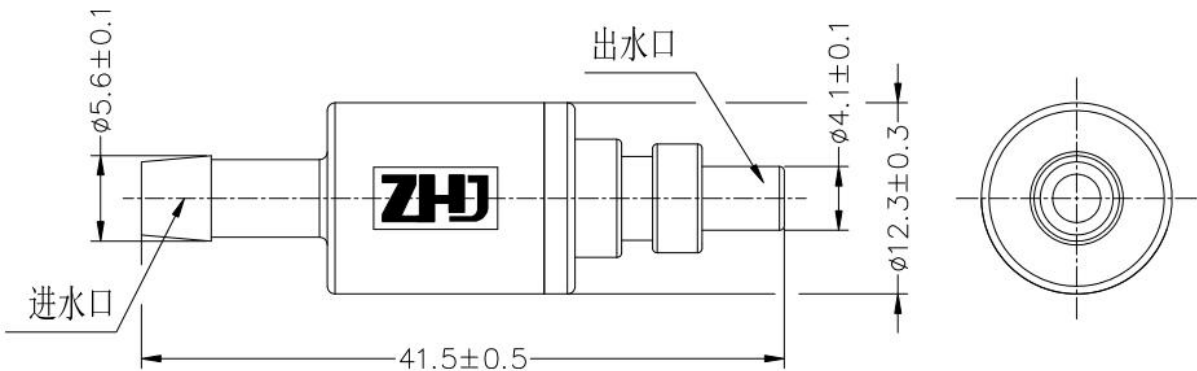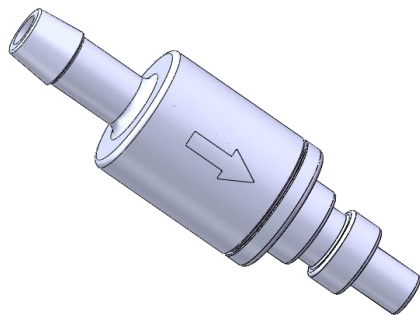


基本规格参数 Specification

适用水压 Water pressure range	0~2.5MPa
打开压力 Cracking pressure	0~10KPa
介质温度 Medium temperature	0 ~ 50℃
使用寿命 Service life	>100K cycles
连接方式 Connection type	宝塔/咖啡机快接接头 Hose Barb Connection/ Coffee Machine Quick Connect

功能特点
Function and Characteristics

快速连接，体积结构小，安装方便；
Quick connection, compact profile design, easy installation.



型号Model : DEV01

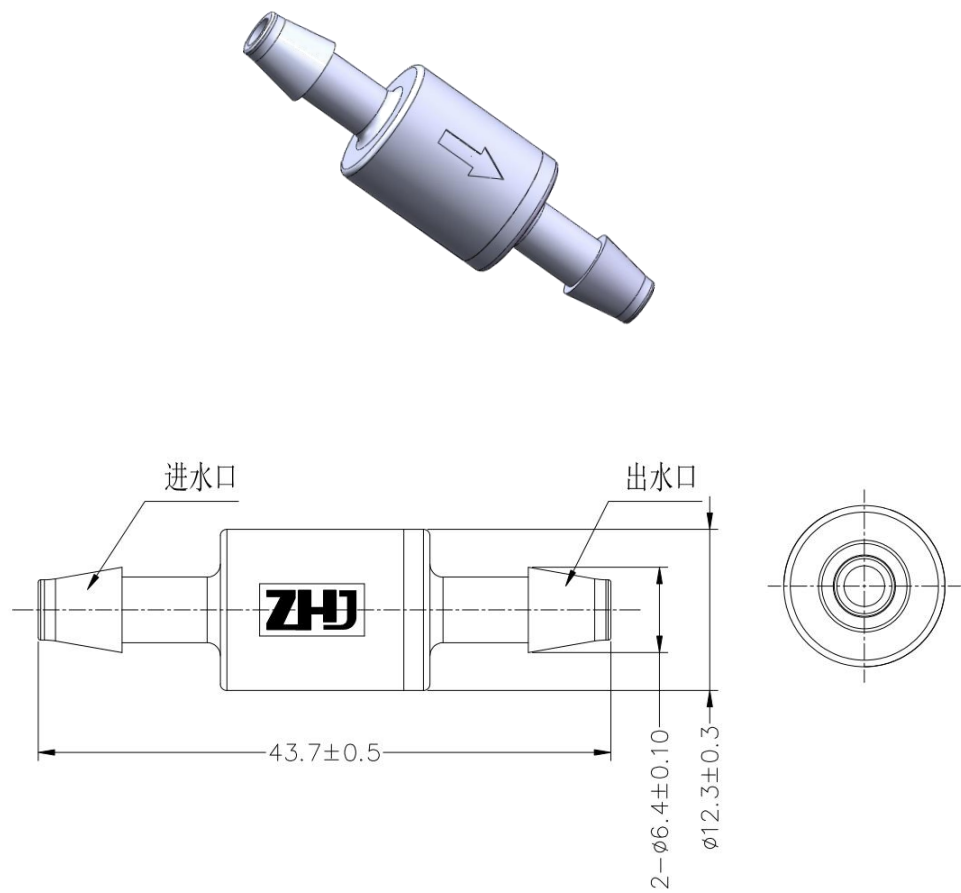

基本规格参数 Specification	
适用水压 Water pressure range	0~2.5MPa
打开压力 Cracking pressure	8~19KPa
介质温度 Medium temperature	0 ~ 50℃
使用寿命 Service life	>100K cycles
连接方式 Connection type	宝塔接头 Hose Barb Connection

功能特点 Function and Characteristics
快速连接，体积结构小，安装方便； Quick connection, compact profile design, easy installation.

型号Model : DEV01

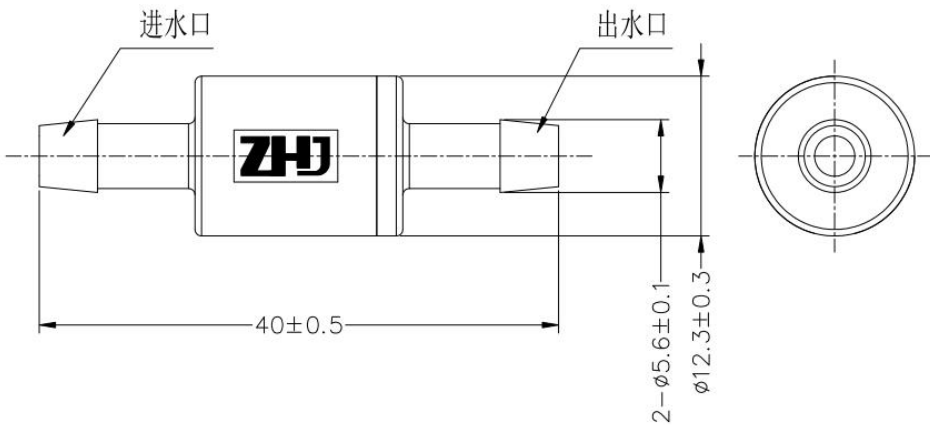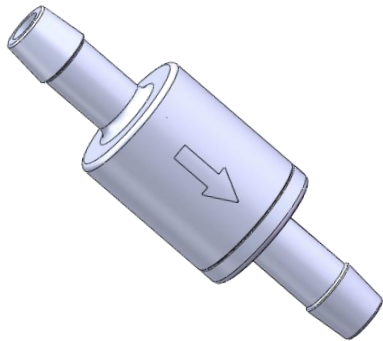

基本规格参数 Specification

适用水压 Water pressure range	0~2.5MPa
打开压力 Cracking pressure	20~40KPa
介质温度 Medium temperature	0 ~ 50℃
使用寿命 Service life	>100K cycles
连接方式 Connection type	宝塔接头 Hose Barb Connection

功能特点
Function and Characteristics

快速连接，体积结构小，安装方便；
Quick connection, compact profile design, easy installation.